

5MP PTZ Parrot Camera

EM-IQP(14W5Z)

- 5Mega-pixel @30fps
- 5X (2.7~13.5mm) Power Zoom Lens
- 14W Speaker intergrated camera for broadcasting
- IP66, IK10




Specification

Model		EM-IQP(14W5Z)
Camera	Image Sensor	1/2.8" 5Megapixel progressive CMOS
	Electronic Shutter Speed	1 sec ~ 1/10,000sec(60/30 mode) 1 sec ~ 1/10,000sec(50/25mode)
	Min. Illumination	0.05Lux (Color), 0.01Lux(B/W), 0 Lux (IR)
	Illumination Distance	IR LED : 30 m Warm LED : 10m
Lens	Lens Type	Motorized
	Focal Length	2.7 ~ 13.5mm, F1.6 ~ F2.8
	Field of View	103.4°(W) ~ 23.8°(T)
PTZ	Pan/Tilt Radius	Pan: 360° (Endless) / Tilt : -40° ~ +45°
	Pan/Tilt Speed	Pan: 0.1°~ 90°/sec / Tilt : 0.1° ~ 20°/sec
	Preset	256
	Group	8 Groups (Max. 16 presets)
Video	Video Compression	H.265 / H.264 / MJPEG
	Video Frame Rate	Max. 30 fps for 5M/4M/1080P/720P/D1
Function	Day/Night	Auto / Day / Night(ICR)
	BLC/HLC/WDR	Yes
	White Balance	Auto/Indoor/Outdoor/Manual
	IVS	Motion Detection, Line Cross, Area Entrance, Area Exit, Appear/Disappear

Specification

Audio	Audio Compression	G.711 A-law, G.711 μ -law, 128kbps, sampling rate 8kHz
	Speaker	14.3W 6 Ω
Network	Interface	RJ-45 (10 Base-T /100 Base-Tx)
	Protocol	IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, NTP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP
	Interoperability	ONVIF(Profile S)
	User/Host	10
Power	Power Supply	DC12V 24W / PoE
Environment	Operating Conditions	-30°C to +50°C /less than $\leq$ 95% RH
	Protection	IP66, IK10
Structure	Dimensions	190 mm $\times$ 233 mm $\times$ 265 mm
	Net Weight	3.3kg

Dimensions

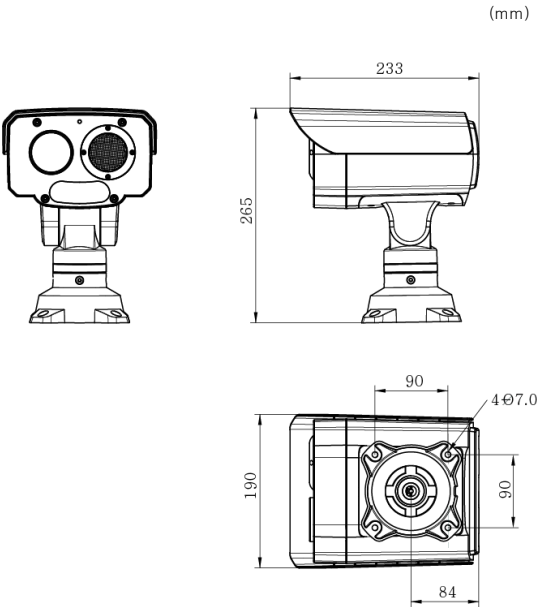

Certification

