

5MP Bullet Type Camera

EM-IQV(IR2713ZP)



- 5Mega-pixel @30fps
- 2.7~13.5mm Varifocal Lens Type
- Clear video quality with H.265 / H.264 compression
- IP67

Specification


Model		EM-IQV(IR2713ZP)
Camera	Image Sensor	1/2.7" Progressive Scan CMOS Sensor
	Max. Resolution	5 Mega pixels
	Electronic Shutter Speed	1/3 sec ~ 1/10,000sec
	Min. Illumination	COLOR : 0.006 Lux@F1.0, AGC ON B/W : 0 Lux with light
	S/N Ratio	> 56 dB
	Illumination Distance	More than 70M, Wave: 850nm
Lens	Lens Type	Motorized Varifocal
	Focal Length	f = 2.7 ~ 13.5mm, F1.6
	Field of View	Horizontal FOV: 110° ~ 38° Vertical FOV: 58° ~ 21° Diagonal FOV: 130° ~ 42°
Video	Video Compression	H.265 / H.264 / MJPEG
	Video Frame Rate	Max. 30 fps
	Stream Capability	3 streams
	Resolution	Main : 5M / 4M / 1080P Second : 720P / D1 / CIF Third : CIF
	Max. Frame Rate	Max. 30 fps for 5M / 4M / 1080P / 720P / D1 / CIF
Function	Day/Night	Auto / Day / Night
	DNR(2D/3D)	2D/3D Support
	BLC/HLC	OFF / BLC / WDR
	White Balance	Auto/Manual
	Basic Event	Motion Detection, Abnormal Sound Detection
	IVS	Smart Motion Detection, Line Crossing, Area Intrusion, Region Entrance/Exit, Fast Moving

Specification

Network	Interface	RJ-45 (10/100 Base-T)
	Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,IGMP,UPnP,SMTP
	Interoperability	ONVIF(Profile S)
	User/Host	10
Power	Power Supply	12V DC/PoE (802.3af)
	Power Consumption	Max. 10W
Environment	Operating Conditions	-40 C to +60 C /less than ≤ 95% RH
	Protection	IP67
Structure	Dimensions	Φ76 x 215.8mm
	Net Weight	490g

Dimensions

(mm)

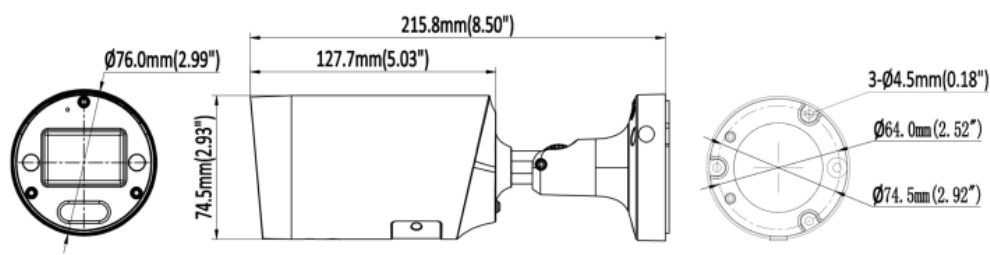

Certification

