

Network Display Server

NDS-04-4K



- 4 Full HD or UHD monitors
 - Support for up to 64CH display per monitor
 - Support monitor screen pivot (90° /180° /270°)
 - Delay-free display using NVR real time protocol
- ROI enables natural monitor connection part image
 - Up to 128 units can be connected (up to 512 monitors, up to 8192CH display)
 - CMS video and video wall control at the same time
 - 1U Rack Type Case


Specification

Model		EM-NDS-04-4K
Monitor	Output	4 of HDMI ports
	Output Performance	Full-HD Monitor Display – up to 4ea Ultra HD Monitor Display – up to 4ea
Video output Performance	Full-HD Monitor	D1(720x480): 4 x 1,920fps HD(1280x720): 4 x 960fps Full HD(1920x1080): 4 x 480fps Ultra HD(3840x2160): 4 x 120fps
	Ultra HD Monitor	D1(720x480): 4 x 1,920fps HD(1280x720): 4 x 960fps Full HD(1920x1080): 4 x 480fps Ultra HD(3840x2160): 4 x 120fps
Operating System		Linux 64bit (Embedded)
CPU		2ea Quad Core 2.4GHz or Higher
RAM		DDR4 32GB RAM
GPU		Integrated Graphic(Intel® Iris® Xe Graphic)
Disk		M.2 SSD 32GB
Network	Interface	4ea of 1/2.5Gbps Ethernet (RJ45)
	Bandwidth Control	Auto
Operating Temp / Humidity		0℃~40℃ / 0%~90%
Power Supply / Current		2ea of DC12V 5A
Dimension (W x H x D)		430.0(W) x 45.0(H) x 248.0(D) mm
Weight		Approx. 2.98kg

Dimensions

Certification

(mm)

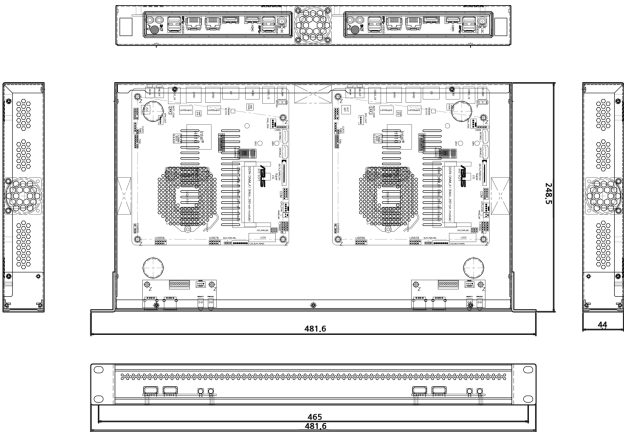

※ USB type product should be used when KVM switches are used. (PS/2 type not available)
※ The specification of this product may change without prior notice..