

Network Display Server

NDS-mini-4K




- 1, 4K-UHD monitor
- Support for up to 64CH display per monitor
- Support monitor screen pivot (90° /180° /270°)
- Delay-free display using NVR real time protocol
- ROI enables natural monitor connection part image
- CMS video and video wall control at the same time

Specification

Model		EM-NDS-mini-4K
Monitor	Output	1 of HDMI
	Output Performance	Full-HD Monitor Display – up to 1ea(60Hz) Ultra HD Monitor Display – up to 1ea(60Hz)
Video output Performance	Full-HD Monitor	D1(720x480): 1,920fps HD(1280x720): 960fps Full HD(1920x1080): 480fps Ultra HD(3840x2160): 120fps
	Ultra HD Monitor	D1(720x480): 1,920fps HD(1280x720): 960fps Full HD(1920x1080): 480fps Ultra HD(3840x2160): 120fps
Operating System		Linux 64bit (Embedded)
CPU		Dual Core 1.8GHz or Higher
RAM		DDR4 16GB RAM
GPU		Integrated Graphic
Disk		SSD mSATA 16GB
Network	Interface	2ea of 1/2.5Gbps Ethernet (RJ45)
	Bandwidth Control	Auto
Operating Temp / Humidity		0℃~40℃ / 0%~90%
Power Supply / Current		DC12V 5A
Dimension (W x H x D)		185.0(W) x 45.0(H) x 197.5(D) mm
Weight		Approx. 1.04kg (without VESA Mount)

외관도

(mm)

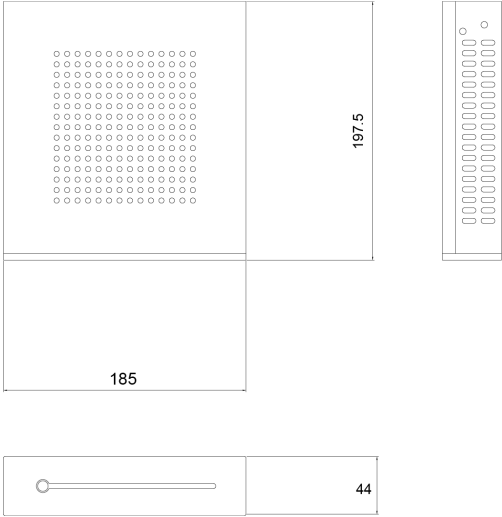

인증



※ USB type product should be used when KVM switches are used. (PS/2 type not available)
※ The specification of this product may change without prior notice..