

Total Security Solution

Network Video Recorder
Video Management System
Central Monitoring System
Network Display Server

日本語

2026



EMSTONE が設計・製造するネットワーク化された世界の 生活の安全性に対応する高信頼のセキュリティ機器

EMSTONEは、便利で信頼性の高い世界最高水準の映像セキュリティ機器を開発・製造しています。長年にわたり蓄積された技術と経験をもとに、より安全な世界のために最善を尽くしています。技術の発展とともに増え続ける様々なセキュリティソリューションを融合し、一つのHUBの役割を担っていきたいと考えています。



EMSTONE 製品の強み

01

LINUXをベースとしたPC型監視ソリューション

Linuxベースのアプリケーションで、最大1024 CHの監視・検索・保存が可能です。効率的なリソース制御により、オペレーティングシステムの安定性を確保します。

02

サードパーティーソリューションとの連携

様々なサードパーティー（LPR、火災、AI、非常ベル、エレベーターなどの）システムとの連携により、映像ベースのシステム統合をサポートします。そしてサードパーティーのためにAPIを提供します。

03

高解像度画像表示

物理的な制限なくIPカメラ、画像、映像、サーバーのリアルタイム監視が可能で、超高解像度な表示に対応します。

04

ユーザーフレンドリーなGUI

カレンダー/時刻検索機能や簡単なイベント設定など、直感的でわかりやすいインターフェース構成により、ユーザーにとって使いやすいものとなっています。

事業分野

都市監視



施設



発電所、工場



交通施設



軍事エリア



教育施設



病院



ホテル



デパート



REDBACK VMS は統合ビデオ管理に最適なVMSソリューションです。
REDBACK VMS 1台で、最大1,024Chの映像を管理そして配信ができます。

注目 ポイント

01


これからのVMS市場はコントロールセンターの操作だけではなく、ハブの役割も求められます。




増え続けるサードパーティのソリューションに早く便利に接続するための経路として機能します。

02

サーバーの物理的な増加により、管制室のスペース効率を改善する必要があります。

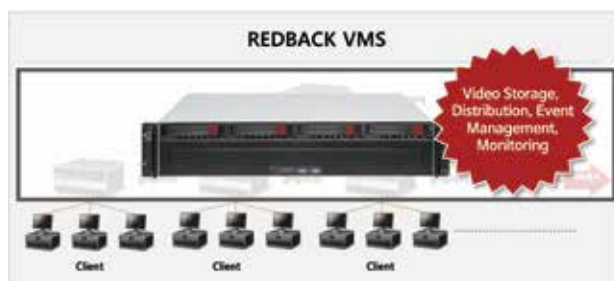

1台のサーバーでマスター、ディストリビューション、ストレージの役割を果たします



2,600チャンネルのシステムをサーバーラックで設置したときの例

製品 ラインナップ




特長



主な機能



- ▶ ONVIF / RTSP 標準プロトコル準拠
- ▶ 様々なメーカーの音声、動き、センサー入出力の連動

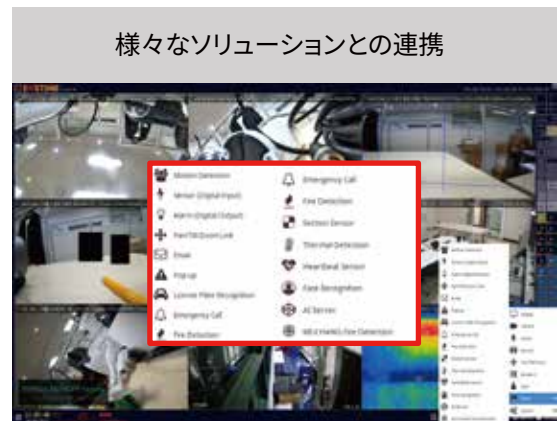

- ▶ 目的に合わせたソリューションの統合やカスタマイズが可能



- ▶ 未登録ユーザーのアクセス制限や
パスワード漏洩防止のための生体認証



- ▶ 日にち/時間/分による素早い検索



- ▶ イベントの条件による検索



- ▶ 連動したイベント発生時のリアルタイムライブ監視機能

EMSTONE NVR シリーズは、統合ソフトウェアをベースとした、さまざまなチャンネルに対応し、高精細な画像処理に対応する録画装置です。さまざまなサードパーティシステムとの相互連携により、映像ベースのシステム統合をサポートします。

製品情報

LINUXベースのPC NVR統合監視ソリューション



- ▶ 高信頼性の 64ビットLinuxをベースにしたNVR
- ▶ 12M / 8M / 5M / 2M / 1.3Mを含むすべての解像度に対応
- ▶ ONVIF/RTSP 標準プロトコルに対応
- ▶ 動き / センサー / カメラ信号ロス / ディスクエラーなどのイベント
- ▶ 生体認証を使用したユーザー認証に対応
- ▶ 双方向音声機能に対応



- ▶ 高効率な H.265 / H.264 圧縮方式による鮮明な画質
- ▶ DOM-SSDによる高速で安定したシステム運用
- ▶ 動体検知 / イベント / スケジュールなどの多彩な録画モード
- ▶ マルチユーザーモード、スクリーンロックに対応
- ▶ フェイルオーバーシステムに対応
- ▶ モデルラインナップ: 4, 9, 16, 25, 36, 49, 64, 81, 100, 128CH

主な機能

映像検索



- ▶ 日付/時/分による素早い検索

イベント検索



- ▶ イベント状況による検索

指紋認証マウスによるユーザー認証



- ▶ 未登録者のアクセス制限やパスワードの漏洩を防止する生体認証機能

イベント時のライブ画面選択



- ▶ イベント発生に連動したリアルタイムライブ監視

各種 ソリューションの 連携が可能

業務用途に応じたソリューション連携・カスタマイズが可能

 動体検知	 ポップアップ	 セクションセンサー	 AIサーバー
 センサー(デジタル入力)	 ナンバープレート認識	 熱感知	 エレベーター
 アラーム(デジタル出力)	 緊急通報	 心拍センサー	 計測器
 パン・チルト・ズーム連動	 火災検知	 顔認証	 メール

AIカメラ連携



インテリジェントなカメラ画像解析により、人、物体を検知し解析結果に応じたイベントを適用して、迅速に対応するインテリジェントな統合制御ソリューションを提供します。

AI ボックス、AIサーバー連携



AIに対応していないカメラでも、AI ボックスとAI サーバーの連動により、対応する映像に対してインテリジェントな映像解析を行い、イベント連携による統合的なソリューションを提供します。

緊急通報連携



緊急時に緊急映像やE-Map上のポップアップ、警告音で緊急通報システムを迅速に配信し、対応することができるソリューションです。

エレベーターCRT連携



エレベーターCRTシステムとの連携により、エレベーターの運行情報を画面に表示・蓄積し、エレベーターの運行情報の検索に対応します。このことで、検索時間の短縮による利便性の向上と、ライブ/検索映像の運行情報を直感的に表示することによる正確な映像解析が可能なソリューションになっています。

炎 / 煙検知



カメラ映像をリアルタイムに解析し、炎や煙を検知するソリューションです。幅広い監視が可能で、ユーザーはリアルタイムに映像で火災の有無を確認し、迅速に対応することができます。

サーマルカメラとの連携



設定エリア内でのオブジェクトの移動方向を分析し、入退場者数をカウントします。施設運営の効率化や混雑度の管理に活用できます。

REDBACK AI

誰でも簡単に設定でき、ディープラーニングに基づく高い認識率と分析精度を誇ります。

オブジェクト分類および姿勢の分析を通して、重要データを選別してモニタリングします。

信頼性の高いイベント分析により、事前警告・重要通知・効果的なモニタリングを実現します。

継続的なファームウェアアップデートを通じて、最新のAI学習データを提供します。

既存のカメラとも互換性があり、単一サーバーで複数カメラの分析をサポート、柔軟なサーバー拡張も可能です。

VMS、NVR、CMS、IPウォールおよびサードパーティ製品群との連携・統合を提供します。



Ai-SERVER-mini



Ai-SERVER-Slim

AI Deep Learning Analysis



AIディープラーニングで学習されたデータを用いて映像を分析し、オブジェクト分類、ポーズ解析を行い、定義されたアルゴリズムに基づいて侵入・徘徊・暴行・転倒などのイベントおよびモニタリングを提供します。

Easy Setup



誰でも簡単に設定できるUIを提供します。ユーザーは使用するイベントアルゴリズムを選び、通知条件を入力し、分析エリアを選択するだけで設定が完了します。



RTSP



Hanwha
Vision



BOSCH



HIKVISION

DAHUA
TECHNOLOGY

Honeywell

PROBE DIGITAL

TRUEEN

Supports over 130 manufacturers Camera protocols & All Existing IP Cameras

Ai-Analysis Algorithm Function

Safety Zone Intrusion



姿勢 (POSE) を推定して足の位置を判断し、エリアに実際に侵入した人に対してのみイベントを発生させます。一般的な動体検知や侵入検知とは異なり、指定エリアの前に立っているだけの人物は除外して認識できます。

Personal Protective Equipment



作業者が安全ヘルメットを着用しているかを検知し、未着が確認された場合は通知またはイベントを発生させます。建設現場や工場など安全が重要な産業環境において、安全規則の遵守率を高め、潜在的な事故を未然に防ぐ重要な役割を果たします。

Fight



姿勢 (POSE) を分析して、喧嘩や暴行行為を検知しイベントを発生させます。危険地域や学校などでの異常行動を素早く監視し、迅速な対応を支援します。

Fall



姿勢 (POSE) を分析して転倒を検知し、イベントを発生させます。防犯目的や特定施設での異常行動を素早く検知し、迅速な対応を支援します。

Intrusion / Loitering



オブジェクト検知・分類を通じて侵入または徘徊を検知しイベントを発生させます。侵入前の徘徊行動を事前に検知することで、警告通知や先制的な監視が可能になります。

Queueing



特定エリアで待機している人数を検知し、設定された閾値を超えるとイベントを発生させます。混雑度の管理や異常状態の検出に活用されます。

Crowd Counting



特定エリアの人数をカウントし、密集度を分析します。大規模イベントや施設における安全事故防止、群衆制御の最適化に利用されます。

People Counting




設定エリア内でのオブジェクトの移動方向を分析し、入退場者数をカウントします。施設運営の効率化や混雑度の管理に活用できます。

Smart IP ウォールシステム はCCTVの統合制御を必要とする すべての現場に適用できるソリューションです。

本システムと
他システムの
違い

ダイアグラム

他の重厚なサーバー型IPウォールソリューションとは異なり、軽いPCベースのディスプレイサーバーのみで運用されるため、構成がシンプルで拡張性があり、安定性が高い。

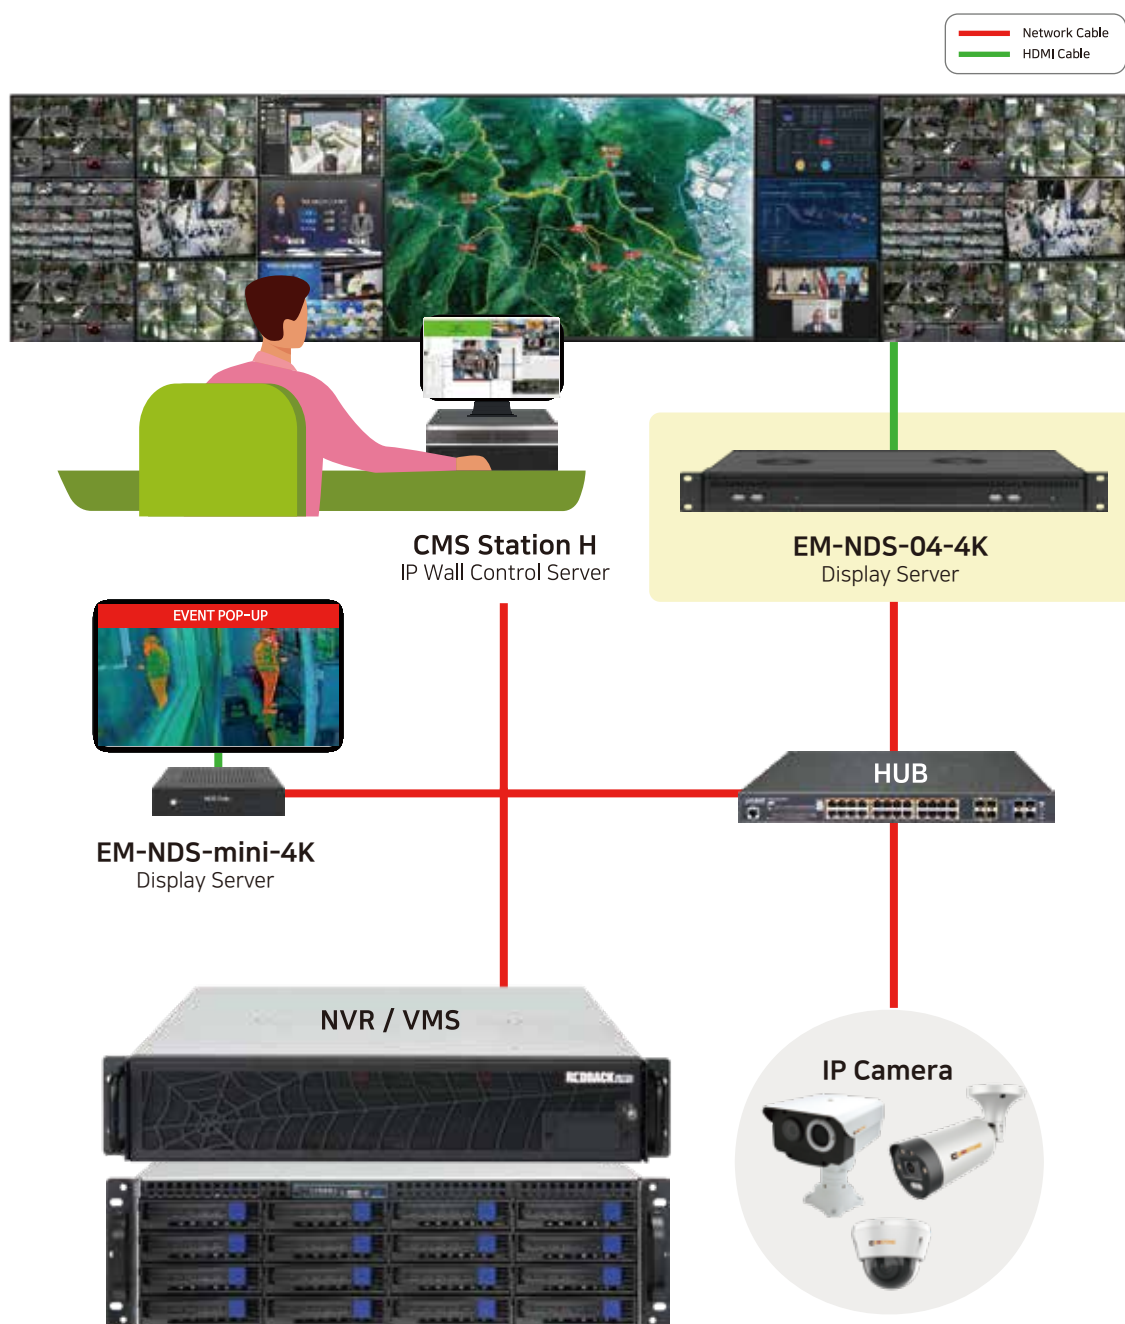


特長

シンプルで直感的なユーザーインターフェース

1クリックでモニターレイアウトや映像プリセットを設定し、現在表示している映像をリアルタイムに反映・表示することができるIPビデオウォール制御UIです。



ウォールモニターに表示する映像を自分の目で確認でき、誰でも簡単に操作できる直感的な設定で、目的の映像をウォールモニターに表示することができます。

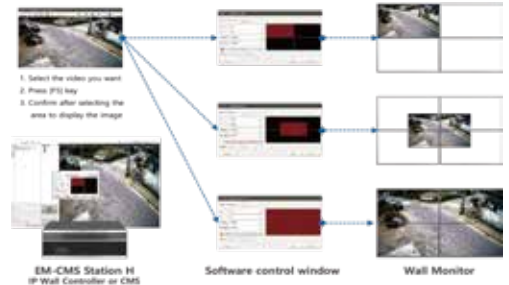

スケーリングを変更しても 変わらないパフォーマンス

従来のビデオウォールシステムではウォールモニターを追加する際、拡張に対応していなかったり、拡張後に劣化することがありました。このシステムではディスプレイサーバーを追加することで拡張が可能となり、パフォーマンスも維持できます。



マルチユーザー、ユーザーごとの権限設定に対応

複数のユーザーが複数のコントロールポイントでビデオウォールの制御を行うことができ、ユーザーごとにウォールモニター制御や映像制御の権限を設定することが可能です。



ウォールモニターに検索ボックスを表示し、 映像の検索が可能

リアルタイム映像やエンコード映像しか表示できない従来のビデオウォールシステムとは異なり、録画機器と連携した検索ボックスをウォールモニターに表示することで映像の検索が可能です。




NVRや連携システムのイベント表示機能

NVRや連携したシステムでイベントが発生したとき、ウォールモニターは映像ポップアップ、イベントメッセージ、静止画ポップアップ、ビデオウォールプリセットなどを機能させることができます。



自由なモニターレイアウト設定

通常の横型や縦型に加えて、モニターの組み合わせやサイズの異なる非定型モニター配列にも対応します。

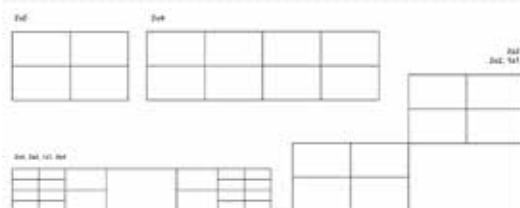

ビデオウォールDIDモニター制御

ビデオウォールのDID(digital information display) モニターを画面上のボタンで電源ON/OFF、輝度や接続方法の制御が可能です。



主な製品ラインナップ

Video Management System

REDBACK VMS Performance Series



Central Monitoring System

CMS Station H



Network Video Recorder

1U B2



2UB8-E



3UB16-E



4UB24-E



Smart IP Wall

EM-NDS-mini-4K



EM-NDS-04-4K



Ai Analysis Server

Ai-SERVER-mini



Ai-SERVER-Slim



さまざまなメーカーの多くのカメラプロトコルに対応



- ▶ ONVIF / RTSP 標準プロトコルに対応
- ▶ さまざまなメーカーの音声、モーション、センサー入力/出力 のイベント連動



※ 製品の仕様は予告なく変更することがあります。

Performance Series

REDBACKVMS

Specification

Model		EM-VMS256B8+	EM-VMS512B8+
Video Input	IP Camera	256CH	512CH
	Max. License	up to 512CH	up to 1024CH
CPU		Intel i7(12Cores, up to 4.7GHz)	
RAM		DDR5 32GB	DDR5 64GB
SSD		mSATA SSD 120GB(OS, VMS)	
Display	Monitor output	2 x HDMI (4K60Hz)	
	Split screen	(1/2/4/6/7/9/10/13/16/25/36/49/64/81/100/128)	
Performance	Live/Play	FHD 64 channel simultaneous live/ play (Max 32Mo support for 1 camera)	
	Storage	Storage/Transmission of 128 FHD channels per HDD	
Network	Interface	2.5GbE 2ports and 10GbSFP+ 1port	2.5GbE 2ports and 10GbSFP+ 2port
	Bandwidth	15Gbps	25Gbps
	Simultaneous Access	1024(within network bandwidth)	
	Protocol	TCP/IP,UDP,DNS,DDNS,HTTP,NTP,RTP/RTCP,RTSP	
	Bandwidth Control	Auto, Manual	
Recording	Mode	Continuous, Schedule, Event linkage	
	Performance	Max CH x 4Mbps (up to Network Bandwidth of Storage System), CIF-32MP	
	Compression	H.265 / H.264 / MJPEG / MPEG4	
Search/ Play	Search Mode	Date / Time Calendar Search, Channel Bundle Search, Event Search	
	Play-Back Control	Forward / Reverse Playback (High Speed: x1 ~ x32, Low Speed: 1/4 ~ 1/2), Before / After Staff	
IP Camera	Resolution	CIF-32M	
	Protocol	Supported ONVIF / RTSP and Axis / Sony / Panasonic / Hanwha / Truen / Dahua / HIKVISION etc. over 130+	
Operating System		Linux 64bit(Embedded)	
Storage	Default	N/A	
	Available	Up to 8ea SATA type 3.5" HDDs (24TB HDD ~ Max 192TB, Surveillance / Enterprise Level)	
	RAID(option)	Support for external RAID 0/1/5/6/50/60 for EM-JBCD24B connections (up to 2ea) (Enterprise Level HDD only, up to 1,152TB)	
	Non-RAID (option)	HBA for EM-JBCD24B connections (up to 2ea) (Surveillance / Enterprise Level, Max 24TB x 24Bay x 2EA = 1,152TB)	
	SAN (FC,option)	HBA for SAN Storage connections (4G/8G/16G Single/Dual)	
	iSCSI (IP SAN)	Supported	
Back-up	Mode	Video (Multiple Channels, Time / Event Subtitle, Encryption), Still Image (Partial Mosaic supported)	
	File Format	MP4, JPG	
Event	Type	Motion Detection, Sensor, Relay, Disk Failure, Camera Signal Loss / Recovery, Emergency Call, LPR, POS, Elevator, Flame / Smoke Detection, Abnormal Sound Detection, Thermal Event, Intelligent Server Integration	
	Action	Recording, Alarm, Camera pop-up, Warning message, Warning sound, E-mail, FTP, Preset	
Application	PC	Live, Search, Backup, Event Manager, E-Map, Multi-monitors, Pan/Tilt/Zoom Control, NVR Setting	
	Web	Live, Pan / Tilt / Zoom for all channels	
	Mobile	iOS / Android Apps	
Security		Multi User Level, Biometric Authentication	
Failover		Supported	
Data/Time Synchronization		NTP timeserver, own NTP server function, self synchronization via GPS(option)	
Intelligent Solution	Built-in SW	EMSTONE video analysis AI-based flame/smoke detection 1 channel(≠ Additional License Options)	
	External	E/L CRT system, EM-call system, LPR Camera, Flame/Smoke Detect system, Password management solution, Video export security system	
	Interworking Analysis Server	EMSTONE-AI, Intellivix, NEXREAL, IVS, HanwhaVision, Truen, ITX, CHAJA, Neotech	
Operating Temp / Humidity		5℃~40℃ / 0%~90%	
Power Supply / Current		SMPS 500W (input from AC100~240V 50/60Hz)	
Product Dimension (W x H x D) / Weight		430.4(W) X 88.4(H) X 480(D)mm / 12kg (without HDD)	
Packing Dimension(W x H x D) / Weight		570(W) X 175(H) X 710(D)mm / 15.5kg (without HDD)	

※ The specification of this product may change without prior notice.

Network Video Recorder

Performance Series

1UB2



Specification

Model		EM-04B2	EM-09B2	EM-16B2	EM-25B2
Video input	IP Camera	4CH	9CH	16CH	25CH
CPU		Dual Core 1.0GHz or Higher			
RAM		DDR4 4GB		DDR4 8GB	DDR4 16GB
Display	Monitor output	1xHDMI / 1xVGA			
	Split screen	1/2/4	1/2/4/6/7/9	1/2/4/6/7/9/10/13/16	1/2/4/6/7/9/10/13/16/25
	Performance (CH/fps)	12M(1CH/15fps) 8M(1CH/30fps) 5M(2CH/60fps) 1080P(4CH/120fps)	12M(1CH/30fps) 8M(2CH/60fps) 5M(4CH/120fps) 1080P(9CH/270fps)	12M(2CH/60fps) 8M(4CH/120fps) 5M(6CH/180fps) 1080P(16CH/480fps)	12M(3CH/90fps) 8M(4CH/120fps) 5M(6CH/240fps) 1080P(25CH/750fps)
Recording	Mode	Continuous, Schedule, Event linkage			
	Performance	Max. 500Mbps / CIF ~12MP			
	Compression	H.265 / H.264 / MPEG4 / MJPEG			
Search/Play	Search Mode	Date / Time Calendar Search, Channel Bundle Search, Event Search			
	Play-Back Control	Play forward / backward (fast:x1~x32, slow:1/4~1/2), Step forward / backward			
IP Camera	Resolution	CIF~12M			
	Protocol	Supported IP Camera and ONVIF / RTSP			
Operating System		Linux 64bit(Embedded) / mSATA SSD 16GB(OS, NVR SW DISC)			
Storage	Default	None			
	Available	Up to 2ea 3.5" HDD can be installed (20TB HDD, available, up to 40TB capacity)			
	RAID/External	Not Supported			
	Hot Swap	Hot Plug Supported			
Back-up	Backup Mode	Video(multiple back up, date/time/event information display, encryption function support), still image(partial mosaic support)			
	File Format	MP4, JPG			
Application	PC	Live, Search, Backup, Event Manager, E-Map, Multi-Monitor, PAN / TILT / ZOOM Control, NVR Setting			
	Web	All Channel Live, PAN/TILT/ZOOM Control			
	Smart Phone	Provide iPhone / Android APP			
Network	Interface	10/100/1000 Base-Tx Ethernet (RJ45) - 1ea			
	Maximum User	1024 (within network bandwidth)			
	Protocol	TCP/IP, UDP, DNS, DDNS, HTTP, NTP, RTP/RTCP, RTSP			
Operating temperature / humidity		5℃~40℃ / 0%~90%			
Power / Power Consumption		DC12V 5A Adapter (AC100 ~ 240V 50/60Hz)			
Dimension (W x H x D)		430.0(W) X 44.5(H) X 249.5(D)mm			
Weight		3.66Kg(without HDD)			

※ The specification of this product may change without prior notice.

Network Video Recorder



Performance Series

2UB8-E



Specification

Model		EM-16B8-E	EM-25B8-E	EM-36B8-E	EM-64B8-E	EM-128B8-E
Video Input	IP Camera	16CH	25CH	36CH	64CH	128CH
CPU		intel Celeron(5Cores, up to 1.1GHz)		intel i5(12Cores, up to 4.4GHz)		
RAM		DDR5 16GB		DDR5 32GB		
SSD		mSATA SSD 16GB(OS, NVR)				
Display	Monitor output	2 x HDMI (4K60Hz)				
	Split screen	(1/2/4/6/10/13/16)	(EM-16B8V2)+ 25	(EM-25B8V2)+ 36	(EM-36B8V2)+ 64	(1/2/4/6/7/9/10/13/16/25/36/48/64 /81/100/128)
Performance	Live/Play	FHD 16CH	FHD 25CH	FHD 36CH	FHD 64 channel simultaneous live/ play (Max 32Mp support for 1 camera)	
	Storage	Storage/Transmission of 128 FHD channels per HDD				
Network	Interface	2.5GbE 2ports				
	Bandwidth	5Gbps				
	Simultaneous Access	1024(within network bandwidth)				
	Protocol	TCP/IP,UDP,DNS,DONS,HTTP,NTP,RTP/RTCP,RTSP				
	Bandwidth Control	Auto, Manual				
Recording	Mode	Continuous, Schedule, Event linkage				
	Performance	Max CH x 4Mbps (up to Network Bandwidth of Storage System), CIF-32MP				
	Compression	H.265 / H.264 / MJPEG / MPEG4				
Search/ Play	Search Mode	Date / Time Calendar Search, Channel Bundle Search, Event Search				
	Play-Back Control	Forward / Reverse Playback (High Speed: x1 ~ x32, Low Speed: 1/4 ~ 1/2), Before / After Staff				
IP Camera	Resolution	CIF-32M				
	Protocol	Supported ONVIF / RTSP and Axis / Sony / Panasonic / Hanwha / Truen / Dahua / HikVISION etc. over 130+				
Operating System		Linux 64bit(Embedded)				
Storage	Default	N/A				
	Available	Up to 8ea SATA type 3.5" HDDs (24TB HDD ~ Max 192TB, Surveillance / Enterprise Level)				
	RAID(option)	Support for external RAID 0/1/5/6/50/60 for EM-JBOD24B connections (up to 2ea) (Enterprise Level HDD only, up to 1,152TB)				
	Non-RAID (option)	HBA for EM-JBOD24B connections (up to 2ea) (Surveillance / Enterprise Level, Max 24TB x 24Bay x 2EA = 1,152TB)				
	SAN (FC,option)	HBA for SAN Storage connections (4G/8G/16G Single/Dual)				
	iSCSI (IP SAN)	Supported				
Back-up	Mode	Video (Multiple Channels, Time / Event Subtitle, Encryption), Still Image (Partial Mosaic supported)				
	File Format	MP4, JPG				
Event	Type	Motion Detection, Sensor, Relay, Disk Failure, Camera Signal Loss / Recovery, Emergency Call, LPR, POS, Elevator, Flame / Smoke Detection, Abnormal Sound Detection, Thermal Event, Intelligent Server Integration				
	Action	Recording, Alarm, Camera pop-up, Warning message, Warning sound, E-mail, FTP, Preset				
Application	PC	Live, Search, Backup, Event Manager, E-Map, Multi-monitors, Pan/Tilt/Zoom Control, NVR Setting				
	Web	Live, Pan / Tilt / Zoom for all channels				
	Mobile	iOS / Android Apps				
Security		Multi User Level, Biometric Authentication				
Failover		Supported				
Data/Time Synchronization		NTP timeserver, own NTP server function, self synchronization via GPS(option)				
Intelligent Solution	Built-in SW	EMSTONE video analysis AI-based flame/smoke detection 1 channel(※ Additional License Options)				
	External	E/L CRT system, EM-call system, LPR Camera, Flame/Smoke Detect system, Password management solution, Video export security system				
	Interworking Analysis Server	EMSTONE-AI, Intellivix, NEXREAL, IVS, HanwhaVision, Truen, ITX, CHAJA, Nectech				
Operating Temp / Humidity		5℃-40℃ / 0%-90%				
Power Supply / Current		SMPS 500W (input from AC100-240V 50/60Hz)				
Product Dimension (W x H x D) / Weight		430.4(W) X 88.4(H) X 480(D)mm / 12kg (without HDD)				
Packing Dimension(W x H x D) / Weight		570(W) X 175(H) X 710(D)mm / 15.5kg (without HDD)				

※ The specification of this product may change without prior notice.

Network Video Recorder

Performance Series

3UB16-E



Specification

Model		EM-36B16-E	EM-64B16-E	EM-128B16-E
Video Input	IP Camera	36CH	64CH	128CH
CPU		Intel i5(12Cores, up to 4.4GHz)		
RAM		DDR5 32GB		
SSD		mSATA SSD 16GB(OS, NVR)		
Display	Monitor output	2 x HDMI(4K60Hz)		
	Split screen	(1/2/4/5/7/9/13/15/25/36)	(1/2/4/5/7/9/13/15/25/36/49/64)	(1/2/4/5/7/9/13/15/25/36/49/64/81/100/128)
Performance	Live/Play	FHD 36CH	FHD 64CH	
	Storage	Storage/Transmission of 128 FHD channels per HDD		
Network	Interface	RJ45 2.5GbE 2ports		
	Bandwidth	5Gbps		
	Simultaneous Access	1024(within network bandwidth)		
	Protocol	TCP/IP,UDP,DNS,DDNS,HTTP,NTP,RTP/RTCP,RTSP		
	Bandwidth Control	Auto, Manual		
Recording	Mode	Continuous, Schedule, Event linkage		
	Performance	Max CH x 4Mbps (up to Network Bandwidth of Storage System), CIF~32MP		
	Compression	H.265 / H.264 / MJPEG / MPEG4		
Search/Play	Search Mode	Date / Time Calendar Search, Channel Bundle Search, Event Search		
	Play-Back Control	Forward/Reverse Playback (High Speed: x1~x32, Low Speed: 1/4~1/2), Before / After Staff		
IP Camera	Resolution	CIF~32M		
	Protocol	Supported ONVIF / RTSP and Axis / Sony / Panasonic / Hanwha / Truen / Dahua / Hikvision etc. over 130+		
Operating System		Linux 64bit(Embedded)		
Storage	Default	N/A		
	Available	Up to 16ea SATA type 3.5" HDDs (24TB HDD - Max 384TB, Surveillance / Enterprise Level)		
	RAID(option)	Support for external RAID 0/1/5/6/10/60 for EM-JBOD24B connections (up to 2ea) (Enterprise Level HDD only, up to 1,152TB)		
	Non-RAID (option)	HBA for EM-JBOD24B connections (up to 2ea) (Surveillance / Enterprise Level, Max 24TB x 24Bay x 2EA = 1,152TB)		
	SAN (FC,option)	HBA for SAN Storage connections (4G/8G/16G Single/Dual)		
	iSCSI (IP SAN)	Supported		
Back-up	Mode	Video (Multiple Channels, Time / Event Subtitle, Encryption), Still Image (Partial Mosaic supported)		
	File Format	MP4, JPG		
Event	Type	Motion Detection, Sensor, Relay, Disk Failure, Camera Signal Loss / Recovery, Emergency Call, LPR, POS, Elevator, Flame / Smoke Detection, Abnormal Sound Detection, Thermal Event, Intelligent Server Integration		
	Action	Recording, Alarm, Camera pop-up, Warning message, Warning sound, E-mail, FTP, Preset		
Application	PC	Live, Search, Backup, Event Manager, E-Map, Multi-monitors, Pan/Tilt/Zoom Control, NVR Setting		
	Web	Live, Pan / Tilt / Zoom for all channels		
	Mobile	iOS / Android Apps		
Security		Multi User Level, Biometric Authentication		
Failover		Supported		
Data/Time Synchronization		NTP timeserver, own NTP server function, self synchronization via GPS(option)		
Intelligent Solution	Built-in SW	EMSTONE video analysis AI-based flame/smoke detection 1 channel(◆ Additional License Options)		
	External	E/L CRT system, EM-call system, LPR Camera, Flame/Smoke Detect system, Password management solution, Video export security system		
	Interworking Analysis Server	EMSTONE-AI, Intellivix, NEXREAL, iVS, HanwhaVision, Truen, ITX, CHAJA, Neotech		
Operating Temp / Humidity		5℃~40℃ / 0%~90%		
Power Supply / Current		SMPS 500W (input from AC100 ~ 240V 50/60Hz)		
Product Dimension (W x H x D) / Weight		430.4(W) X 133.4(H) X 550(D)mm /14.6kg (without HDD)		
Packing Dimension(W x H x D) / Weight		570(W) X 225(H) X 765(D)mm /20.3kg (without HDD)		

※ The specification of this product may change without prior notice.

Network Video Recorder

Performance Series

4UB24-E



Specification

Model		EM-36B24V2	EM-64B24V2	EM-128B24V2
Video Input	IP Camera	36CH	64CH	128CH
CPU		intel i5(12Cores, up to 4.4GHz)		
RAM		DDR5 32GB		
SSD		mSATA SSD 16GB(OS, NVR)		
Display	Monitor output	2 x HDMI(4K60Hz)		
	Split screen	(1/2/4/6/7/9/10/13/16/25/36)	(1/2/4/6/7/9/10/13/16/25/36/49/64)	(1/2/4/6/7/9/10/13/16/25/36/49/64/81/100/128)
Performance	Live/Play	FHD 36CH	FHD 64CH	
	Storage	Storage/Transmission of 128 FHD channels per HDD		
Network	Interface	RJ45 2.5GbE 2ports		
	Bandwidth	5Gbps		
	Simultaneous Access	1024(within network bandwidth)		
	Protocol	TCP/IP,UDP,DNS,DDNS,HTTP,NTP,RTP/RTCP,RTSP		
	Bandwidth Control	Auto, Manual		
Recording	Mode	Continuous, Schedule, Event linkage		
	Performance	Max CH x 4Mbps (up to Network Bandwidth of Storage System), CIF-32MP		
	Compression	H.265 / H.264 / MJPEG / MPEG4		
Search/Play	Search Mode	Date / Time Calendar Search, Channel Bundle Search, Event Search		
	Play-Back Control	Forward/Reverse Playback (High Speed: x1-x32, Low Speed: 1/4-1/2), Before / After Staff		
IP Camera	Resolution	CIF-32M		
	Protocol	Supported ONVIF / RTSP and Axis / Sony / Panasonic / Hanwha / Truen / Dahua / HikVISION etc. over 130+		
운영체제		Linux 64bit(Embedded)		
Storage	Default	N/A		
	Available	Up to 24ea SATA type 3.5" HDDs (24TB HDD - Max 576TB, Surveillance / Enterprise Level)		
	RAID(option)	Support for external RAID 0/1/5/6/50/60 for EM-J80024B connections (up to 2ea) (Enterprise Level HDD only, up to 1,152TB)		
	Non-RAID (option)	HBA for EM-J80024B connections (up to 2ea) (Surveillance / Enterprise Level, Max 24TB x 24Bay x 2EA = 1,152TB)		
	SAN (FC,option)	HBA for SAN Storage connections (4G/8G/16G Single/Dual)		
Back-up	iSCSI (IP SAN)	Supported		
	Mode	Video (Multiple Channels, Time / Event Subtitle, Encryption), Still Image (Partial Mosaic supported)		
Event	File Format	MP4, JPG		
	Type	Motion Detection, Sensor, Relay, Disk Failure, Camera Signal Loss / Recovery, Emergency Call, LPR, POS, Elevator, Flame / Smoke Detection, Abnormal Sound Detection, Thermal Event, Intelligent Server Integration		
Application	Action	Recording, Alarm, Camera pop-up, Warning message, Warning sound, E-mail, FTP, Preset		
	PC	Live, Search, Backup, Event Manager, E-Map, Multi-monitors, Pan/Tilt/Zoom Control, NVR Setting		
	Web	Live, Pan / Tilt / Zoom for all channels		
Security	Mobile	IOS / Android Apps		
		Multi User Level, Biometric Authentication		
Failover		Supported		
Data/Time Synchronization		NTP timeserver, own NTP server function, self synchronization via GPS(option)		
Intelligent Solution	Built-in SW	EMSTONE video analysis AI-based flame/smoke detection 1 channel(☞ Additional License Options)		
	External	E/L CRT system, EM-call system, LPR Camera, Flame/Smoke Detect system, Password management solution, Video export security system		
	Interworking Analysis Server	EMSTONE-AI, Intelivix, NEXREAL, iVS, HanwhaVision, Truen, ITX, CHAJA, Neotech		
Operating Temp / Humidity		5℃-40℃ / 0%-90%		
Power Supply / Current		SMPS 1200W (input from AC100 - 240V 50/60Hz)		
Product Dimension (W x H x D) / Weight		430.4(W) X 175.4(H) X 550(D)mm /17.5kg (HDD without)		
Packing Dimension(W x H x D) / Weight		570(W) X 270(H) X 765(D)mm /23.3kg (HDD without)		

※ The specification of this product may change without prior notice.

Smart IP Wall



Network Display Server

NDS-mini-4K



Specification

Model		EM-NDS-mini-4K
Monitor	Output	1 of HDMI
	Output Performance	Full-HD Monitor Display – up to 1ea(60Hz) Ultra HD Monitor Display – up to 1ea(60Hz)
Video output Performance	Full-HD Monitor	D1(720x480): 1,920fps HD(1280x720): 960fps Full HD(1920x1080): 480fps Ultra HD(3840x2160): 120fps
	Ultra HD Monitor	D1(720x480): 1,920fps HD(1280x720): 960fps Full HD(1920x1080): 480fps Ultra HD(3840x2160): 120fps
Operating System		Linux 64bit (Embedded)
CPU		Dual Core 1.8GHz or Higher
RAM		DDR4 16G RAM
VGA		Integrated Graphic
Disk		SSD mSATA 16G
Network	Interface	2ea of 1/2.5Gbps Ethernet (RJ45)
	Bandwidth Control	Auto
Operating Temp / Humidity		0℃~40℃ / 0%~90%
Power Supply / Current		DC12V 5A
Dimension (W x H x D)		185.0(W) x 45.0(H) x 197.5(D) mm
Weight		Approx. 1.04Kg (without VESA Mount)

※ The specification of this product may change without prior notice.

Smart IP Wall

Network Display Server

NDS-04-4K



Specification

Model		EM-NDS-04-4K
Monitor	Output	4 of HDMI ports
	Output Performance	Full-HD Monitor Display – up to 4ea Ultra HD Monitor Display – up to 4ea
Video output Performance	Full-HD Monitor	D1(720x480): 4 x 1,920fps HD(1280x720): 4 x 960fps Full HD(1920x1080): 4 x 480fps Ultra HD(3840x2160): 4 x 120fps
	Ultra HD Monitor	D1(720x480): 4 x 1,920fps HD(1280x720): 4 x 960fps Full HD(1920x1080): 4 x 480fps Ultra HD(3840x2160): 4 x 120fps
Operating System		Linux 64bit (Embedded)
CPU		2ea Quad Core 2.4GHz or Higher
RAM		DDR4 32G RAM
VGA		Integrated Graphic(Intel® Iris® X® Graphic)
Disk		M.2 SSD 32G
Network	Interface	4ea of 1/2.5Gbps Ethernet (RJ45)
	Bandwidth Control	Auto
Operating Temp / Humidity		0℃~40℃ / 0%~90%
Power Supply / Current		2ea of DC12V 5A
Dimension (W x H x D)		430.0(W) x 45.0(H) x 248.0(D) mm
Weight		Approx. 2.98Kg

※ The specification of this product may change without prior notice.

AI Analysis Server

REDBACK AI

AI-SERVER-mini



Model name		EM-AI04mini	EM-AI08mini	EM-AI16mini	EM-AI00mini
Video input	Default	4CH	8CH	16CH	0CH
	Max	Up to 4CH	Up to 8CH	Up to 16CH	Up to 16CH
Inference Budget		20	20	24	24
CPU		intel i5(14cores)			
GPU		Intel Arc Graphics			
NPU		Intel NPU3 (11TOPs)			
Total TOPs(CPU+GPU+NPU)		Up to 34TOPs			
RAM		DDR5 16GB		DDR5 32GB	
SSD		M.2 SSD 128GB (OS, Event DB)			
Display	Monitor output	1 x HDMI(8K60Hz) + 1 x HDMI(4K60Hz)			
	Split screen	(1/2/4)	(1/2/4/6/9)	(1/2/4/6/10/13/16)	depend on CH
Network Bandwidth / interface		5Gbps / RJ-45 2.5GbE 2port			
Bandwidth Control		Auto, Manual			
Simultaneous Access		1024 (Within network bandwidth)			
IP camera	Resolution	CIF-32M			
	protocol	ONVIF / RTSP and Axis / Sony / Panasonic / Hanwha / Truen / Dahua / HIKVISION etc. over 130+			
OS		Linux 64bit (Embedded)			
Alarm event	type	Motion Detection, Sensor, Relay, Camera Signal Loss / Recovery			
	External	Emergency Call, POS, Thermal Event(Thermal, Sensor)			
Intelligent Event	LPR	EMSTONE video analysis AI-based LPR (Option)			
	Fire / Smoke	EMSTONE video analysis AI-based flame/smoke detection (Option)			
	Intelligent Part 1	EMSTONE video analysis AI-based Intrusion/Loitering/Queuing/people counting/crowding, Safety Zone Intrusion/fail/Fighting/Personal protective Equipment(PPE) and ETC			
Action		Alarm, Camera pop-up, Warning message, Warning sound, E-mail, FTP, Preset, HTTPS API Support			
Security		Multi User Level, Biometric authentication support			
Data/Time Synchronization		NTP timeserver, own NTP server function, self synchronization via GPS(option)			
Operating Temp / Humidity		5℃~40℃ / 0%~90%			
Power Supply / Current		DC12V 10A (AC 100-240V input)			
Dimension (W x H x D)		185(W) x 45(H) x 197.5(D) mm / Approx. 1.14 kg (Vesa mount 0.08kg Without)			
Package Dimension (W x H x D)		350(W) x 76(H) x 235(D) mm / Approx. 1.95 kg			

※ The specification of this product may change without prior notice.

AI Analysis Server

REDBACK AI

AI-SERVER-Slim



Model name		EM-AI16S	EM-AI32S	EM-AI00S
Video input	Default	16CH	32CH	0CH
	Max	Up to 16CH	Up to 32CH	Up to 32CH
Inference Budget		48		
CPU		Dual intel i5 (14+14 cores)		
GPU		Dual Intel Arc Graphics		
NPU		Dual Intel NPU3 (22TOPs)		
Total TOPs(CPU+GPU+NPU)		Up to 68TOPs		
RAM		DDR5 64GB		
SSD		Dual M.2 SSD 128GB (OS, Event DB)		
Display	Monitor output	2 x HDMI(8K60Hz) + 2 x HDMI(4K60Hz)		
	Split screen	(1/2/4/6/9/16)		depend on CH
Network Bandwidth / interface		10Gbps / RJ-45 2.5GbE 4port		
Bandwidth Control		Auto, Manual		
Simultaneous Access		1024 (Within network bandwidth)		
IP camera	Resolution	CIF-32M		
	protocol	ONVIF / RTSP and Axis / Sony / Panasonic / Hanwha / Truen / Dahua / HIKVISION etc. over 130+		
OS		Linux 64bit (Embedded)		
Alarm event	type	Motion Detection, Sensor, Relay, Camera Signal Loss / Recovery		
	External	Emergency Call, POS, Thermal Event(Thermal, Sensor)		
Intelligent Event	LPR	EMSTONE video analysis AI-based LPR (Option)		
	Fire / Smoke	EMSTONE video analysis AI-based flame/smoke detection (Option)		
	Intelligent Part 1	EMSTONE video analysis AI-based Intrusion/Loitering/Queuing/people counting/crowding, Safety Zone Intrusion/fail/Fighting/Personal protective Equipment(PPE) and ETC		
Action		Alarm, Camera pop-up, Warning message, Warning sound, E-mail, FTP, Preset, HTTPS API Support		
Security		Multi User Level, Biometric authentication support		
Data/Time Synchronization		NTP timeserver, own NTP server function, self synchronization via GPS(option)		
Operating Temp / Humidity		5℃~40℃ / 0%~90%		
Power Supply / Current		Dual DC12V 10A (AC 100~240V input)		
Dimension (W x H x D)		430(W) x 45(H) x 248(D) mm / Approx. 3.18 kg		
Package Dimension (W x H x D)		498(W) x 115(H) x 351(D) mm / Approx. 3.60 kg		

※ The specification of this product may change without prior notice.

Smart IP Wall



Central Monitoring Server

CMS Station H



Specification

Model		EM-CMS Station H
CMS Version	Default	CMS Basic Version (8 Host)
	Options	16/64/128/512/1024 Host
Operating System		Ubuntu 22.04 with modified Linux Kernel, OpenGL and X-Windows
CPU		Intel Dual Core 1.8Hz
RAM		DDR4 16G RAM (8Gx2ea)
VGA		Integrated Graphic (included 48 Execution Unit)
Disk		M.2 SSD 128G
Display	Monitor Output	2xHDMI(up to 4K 60Hz support)
	Mode	Various display mode and full screen mode like 1x1, 1x2, 2x1, 2x2, 3x3
	Performance	Full HD 32CH Decoding, Up to 8K(7680x4320) Decoding
Search/Replay	Method	Date / Time Calendar Search, Individual / Channel Bundle Search, Event Search
	Replay Control	Forward direction (high speed:x1~x32), Step forward / backward
Backup	Mode	Video, Still Image
	File Format	MP4, JPG, Encrypted Backup
Video Wall		EMSTONE IP Video Wall System Setup / Control
Event	Type	Motion Detection, Sensor, Relay, Disk Failure, Camera Signal Loss / Recovery, Emergency Bell, License Plate Recognition, POS, Elevator CRT, Fire / Smoke Detection, Abnormal Sound Detection, Thermal Imaging Camera
	Action	Alarm Digital-out, Pop-up Camera, Alarm Sound, Warning Message, Preset Control, IP Video Wall Control (Video / Image / Text Output Control, Preset)
Network	Interface	1/2.5Gbps Ethernet (RJ45) -2ea
	Bandwidth Control	Automatic, Manual
Operating temperature / humidity		5℃~40℃ / 0%~90%
Power / Power Consumption		DC12V 5A
Dimension (W x H x D)		224.0(W) X 88.8(H) X 200.0(D)mm
Weight		Approx. 2.7Kg

※ The specification of this product may change without prior notice.

Camera



5MP Parrot Camera



Specification

Model		EM-IQV(14W5Z)	EM-IQP(14W5Z)
Camera	Image Sensor	1/2.8" 5Megapixel progressive CMOS	
	Electronic Shutter Speed	1 sec ~ 1/10,000sec(60/30 mode) 1 sec ~ 1/10,000sec(50/25mode)	
	Min. Illumination	0.05Lux (Color), 0.01Lux(B/W), 0 Lux (light)	
	Illumination Distance	IR LED : 30 m Warm LED : 10m	
Lens	Lens Type	Motorized Vari-focal	
	Focal Length	2.7 ~ 13.5mm, F1.6 ~ F2.8	
	Field of View	103.4°(W) ~ 23.8°(T)	
PTZ	Pan/Tilt Radius	–	Pan: 360° (Endless) / Tilt : –40° ~ +45°
	Pan/Tilt Speed	–	Pan: 0.1°~ 90°/sec / Tilt : 0.1° ~ 20°/sec
	Preset	255	
	Group	8 Groups (Max. 16 presets)	
Video	Video Compression	H.265 / H.264 / MJPEG	
	Video Frame Rate	Max. 30 fps for 5M/4M/1080P/720P/D1	
Function	Day/Night	Auto / Day / Night(ICR)	
	BLC/HLC/WDR	Yes	
	White Balance	Auto/Indoor/Outdoor/Manual	
	IVS	Motion Detection, Line Cross, Area Entrance, Area Exit, Appear/Disappear	
Audio	Audio Compression	G.711 A-law, G.711 μ-law, 128kbps, sampling rate 8kHz	
	Speaker / Mic	14W 6Ω Built-in Speaker , Built-in MIC (For TSM)	
	Function	TSM (True Sound Monitoring)	
Network	Interface	RJ-45 (10/100 BASE-T)	
	Protocol	ONVIF(profile S), EMSTONE_P, IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, HTTP, HTTPS	
	User/Host	10	
Power	Power Supply	PoE+ / DC12V 2A	PoE+ / DC12V 3.5A
	Operating Conditions	–30°C to +50°C /less than ≤ 95% RH	
	Protection	IP66, IK10	
Structure	Dimensions	190 mm × 233 mm × 125 mm	190 mm × 233 mm × 265 mm
	Net Weight	2.1kg	3.3kg

※ The specification of this product may change without prior notice.

Camera

DOME CAMERA

EM-IQD(F21P)**EM-IQD(IR28P)**

Specification

Model		EM-IQD(F21P)	EM-IQD(IR28P)
Camera	Image Sensor	1/2.7" 5Megapixel progressive CMOS	
	Max. Resolution	2880 x 1620 pixel	
	Electronic Shutter Speed	1/3 sec ~ 1/10,000sec	
	Min. Illumination	0.006Lux (Color), 0.01Lux(B/W)	0.006Lux(Color), 0.01Lux(B/W), 0 Lux (light)
	Illumination Distance	–	More than 30M, Wave: 850nm
	LED Type	–	IR LED, WARM LED
Lens	Lens Type	Fixed	
	Focal Length	2.1mm, F2.1	2.8mm, F1.6
	Field of View	H : 140° / V : 79°	H : 102° / V : 56°
Video	Video Compression	H.265 / H.264 / MJPEG	
	Video Frame Rate	Max. 30 fps for 5M/4M/1080P/720P/D1/CIF	
Function	Day/Night	Auto / Day / Night(ICR)	
	BLC/HLC/WDR	Yes	
	White Balance	Auto / Manual	
	IVS	Motion detection, Video Shelter, Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving	
Audio	Audio Compression	G.711 A-law, G.711 μ-law, 128kbps, sampling rate 8kHz	
	Speaker / Mic	Built-in Mic	–
	Function	Abnormal Sound Detection	–
Network	Interface	RJ-45 (10/100 BASE-T)	
	Protocol	ONVIF(profile S), EMSTONE_P, IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, HTTP, HTTPS	
	User/Host	10	
Power	Power Supply	PoE (802.af) / DC12V (5W)	PoE (802.af) / DC12V (10W)
	Operating Conditions	–30°C to +60°C	
	Protection	IP67, IK10	
Structure	Dimensions	112 mm × 87.5 mm	
	Net Weight	600g	497g

※ The specification of this product may change without prior notice.

Camera

BULLET CAMERA

EM-IQV(IR28P)

EM-IUV(IR2812ZP)



Specification

Model		EM-IQV(IR28P)	EM-IUV(IR2812ZP)
Camera	Image Sensor	1/2.7" 5Megapixel progressive CMOS	1/1.8" 8Megapixel progressive CMOS
	Max. Resolution	2880 x 1620 pixel	3840 x 2160 pixel
	Electronic Shutter Speed	1/3 sec ~ 1/10,000sec	
	Min. Illumination	0.006Lux(Color), 0.01Lux(B/W), 0 Lux(light)	0.003Lux(Color), 0 Lux (light)
	Illumination Distance	More than 30M, Wave: 850nm	More than 70M, Wave: 850nm More than 50M, Warm LED
	LED Type	IR LED, WARM LED	IR LED, WARM LED
Lens	Lens Type	Fixed	Motorized Vari-focal
	Focal Length	2.8mm, F1.6	2.8 ~ 12mm, F1.2 ~ F2.15
	Field of View	H : 102° / V : 56°	H : 112° ~ 48° / V : 59° ~ 28°
Video	Video Compression	H.265 / H.264 / MJPEG	
	Video Frame Rate	Max. 30 fps fo 5M/4M/1080P/720P/D1/CIF	Max. 30 fps fo 8M/6M/5M/4M/1080P/720P/D1/CIF
Function	Day/Night	Auto / Day / Night(ICR)	
	BLC/HLC/WDR	Yes	
	White Balance	Auto / Manual	
	IVS	Motion detection, Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving	
Audio	Audio Compression	G.711 A-law, G.711 μ-law, 128kbps, sampling rate 8kHz	
	Speaker / Mic	–	3W Built-in Speaker, Built-in MIC
	Function	–	Abnormal Sound Detection
Network	Interface	RJ-45 (10/100 BASE-T)	
	Protocol	ONVIF(profile S), EMSTONE_P, IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, HTTP, HTTPS	
	User/Host	10	
Power	Power Supply	PoE (802.af) / DC12V (Max. 10W)	PoE (802.af) / DC12V (Max. 13W)
	Operating Conditions	-30°C to +60°C /less than ≤ 95% RH	
	Protection	IP67, IK10	IP67
Structure	Dimensions	Φ68 x 172.3mm	Φ93.5 x 278.9mm
	Net Weight	490g	1000g

※ The specification of this product may change without prior notice.

Camera

Thermal CAMERA

EM-IX(Q36P)



Specification

Model		EM-IX(Q36P)
Camera	Image Sensor	1/2.8" 5Megapixel progressive CMOS
	Max. Resolution	2880 x 1620 pixel
	Electronic Shutter Speed	1 sec ~ 1/10,000sec
	Min. Illumination	0.01Lux(Color), 0 Lux(light)
	Illumination Distance	More than 20M, Wave: 850nm
	LED Type	IR LED, WARM LED, RED LED (Alarm or Event)
Thermal	Detector Type	IR Array thermal sensor
	Resolution	32 x 24 Pixel
	Max Distance	Max. 10 Meter
Lens	Lens Type	Fixed
	Focal Length	2.8mm, F1.6
	Field of View	H : 102° / V : 56° / D : 121°
Video	Video Compression	H.265 / H.264 / MJPEG
	Video Frame Rate	Max. 30 fps for 5M/4M/1080P/720P/D1/CIF
Function	Day/Night	Auto / Day / Night(ICR)
	BLC/HLC/WDR	Yes
	White Balance	Auto / Manual
Audio	Audio Compression	G.711 A-law, G.711 μ -law, 128kbps, sampling rate 8kHz
	Speaker / Mic	3W Built-in Speaker , Built-in MIC (For TSM)
	Function	TSM (True Sound Monitoring)
Network	Interface	RJ-45 (10/100 BASE-T)
	Protocol	ONVIF(profile S), EMSTONE_P, IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, HTTP, HTTPS
	User/Host	10
Power	Power Supply	PoE (802.af) / DC12V (12W)
	Operating Conditions	-20°C to +50°C
	Protection	IP66
Structure	Dimensions	Φ 93.5 x 278.9 mm
	Net Weight	1000g

※ The specification of this product may change without prior notice.

Camera

Thermal CAMERA

EM-IX(Q2713P)



Specification

Model		EM-IX(Q2713P)
Camera	Image Sensor	1/2.8" 5Megapixel progressive CMOS
	Max. Resolution	2692 x 1944 pixel
	Electronic Shutter Speed	1 sec ~ 1/10,000sec
	Min. Illumination	0.05Lux(Color), 0.001Lux(B/W), 0 Lux(light)
	Illumination Distance	More than 50M, Wave: 850nm
	LED Type	IR LED
Thermal	Detector Type	Uncooled VOx Microbolometer
	Resolution	256 x 194 pixel
	Spectral Range	8 μm~14 μm
	Thermal Sensitivity	≤45mK(@F#1.0, 300k)
	Lens	3.2mm F1.1 (HFOV X VFOV : 51°x 39°)
Lens	Lens Type	Motorized Vari-focal
	Focal Length	2.7 ~ 13.5 mm, F1.6 ~ F 2.8
	Field of View	101.9°(W) ~ 33.1°(T)
Video	Video Compression	H.265 / H.264 / MJPEG
	Video Frame Rate	Max. 30 fps for 5M/4M/1080P/720P/D1/CIF
Function	Day/Night	Auto / Day / Night(ICR)
	BLC/HLC/WDR	Yes
	White Balance	Auto / Manual
	IVS	Motion detection, Line Crossing, Area Intrusion, Region Entrance, Region Exiting
Audio	Audio Compression	G.711 A-law, G.711 μ-law, 128kbps, sampling rate 8kHz
	Speaker / Mic	3W Built-in Speaker
Network	Interface	RJ-45 (10/100 BASE-T)
	Protocol	ONVIF(profile S), EMSTONE_P, IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, HTTP, HTTPS
	User/Host	10
Power	Power Supply	PoE+ / DC12V (18W)
	Operating Conditions	-30°C to +50°C
	Protection	IP66
Structure	Dimensions	132 x 250 x 116 mm
	Net Weight	1300g

※ The specification of this product may change without prior notice.



More videos including product
demonstrations and references



12F, Digital-ro 271, Guro-gu, Seoul, Republic of Korea
T. +82-1600-5978 E. sales@emstone.com www.emstone.com
東京都千代田区東神田1-2-2-309 / 東京都江東区南砂2-5-14-406
T. 03-5838-2196 E. info@emstone.co.jp www.emstone.co.jp