

5MP PTZ Parrot Camera

EM-IQP(14W5Z)

- 5Mega-pixel @30fps
- 14W 스피커 일체형으로 방송 가능
- 5배줌 (2.7~13.5mm) 전동 줌 렌즈
- 방수, 방진 인증 IP66등급




제품 사양

| 모델명      |                          | EM-IQP(14W5Z)                                                            |
|----------|--------------------------|--------------------------------------------------------------------------|
| Camera   | Image Sensor             | 1/2.8" 5Megapixel progressive CMOS                                       |
|          | Electronic Shutter Speed | 1 sec ~ 1/10,000sec(60/30 mode)<br>1 sec ~ 1/10,000sec(50/25mode)        |
|          | Min. Illumination        | 0.05Lux (Color), 0.01Lux(B/W), 0 Lux (IR)                                |
|          | Illumination Distance    | IR LED : 30 m<br>Warm LED : 10M                                          |
| Lens     | Lens Type                | Motorized                                                                |
|          | Focal Length             | 2.7 ~ 13.5mm, F1.6 ~ F2.8                                                |
|          | Field of View            | 103.4°(W) ~ 23.8°(T)                                                     |
| PTZ      | Pan/Tilt Radius          | Pan: 360° (Endless) / Tilt : -40° ~ +45°                                 |
|          | Pan/Tilt Speed           | Pan: 0.1°~ 90°/sec / Tilt : 0.1° ~ 20°/sec                               |
|          | Preset                   | 256                                                                      |
|          | Group                    | 8 Groups (Max. 16 presets)                                               |
| Video    | Video Compression        | H.265 / H.264 / MJPEG                                                    |
|          | Video Frame Rate         | Max. 30 fps for 5M/4M/1080P/720P/D1                                      |
| Function | Day/Night                | Auto / Day / Night(ICR)                                                  |
|          | BLC/HLC/WDR              | Yes                                                                      |
|          | White Balance            | Auto/Indoor/Outdoor/Manual                                               |
|          | IVS                      | Motion Detection, Line Cross, Area Entrance, Area Exit, Appear/Disappear |

## 제품 사양

|             |                      |                                                                            |
|-------------|----------------------|----------------------------------------------------------------------------|
| Audio       | Audio Compression    | G.711 A-law, G.711 $\mu$ -law, 128kbps, sampling rate 8kHz                 |
|             | Speaker              | 14.3W 6 $\Omega$                                                           |
| Network     | Interface            | RJ-45 (10 Base-T/100 Base-Tx)                                              |
|             | Protocol             | IPv4, TCP/IP, UDP, RTP, RTSP, RTMP, NTP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP |
|             | Interoperability     | ONVIF(Profile S)                                                           |
|             | User/Host            | 10                                                                         |
| Power       | Power Supply         | DC12V 24W / PoE                                                            |
| Environment | Operating Conditions | -30°C to +50°C /less than $\leq$ 95% RH                                    |
|             | Protection           | IP66, IK10                                                                 |
| Structure   | Dimensions           | 190 mm $\times$ 233 mm $\times$ 265 mm                                     |
|             | Net Weight           | 3.3kg                                                                      |

## 외관도

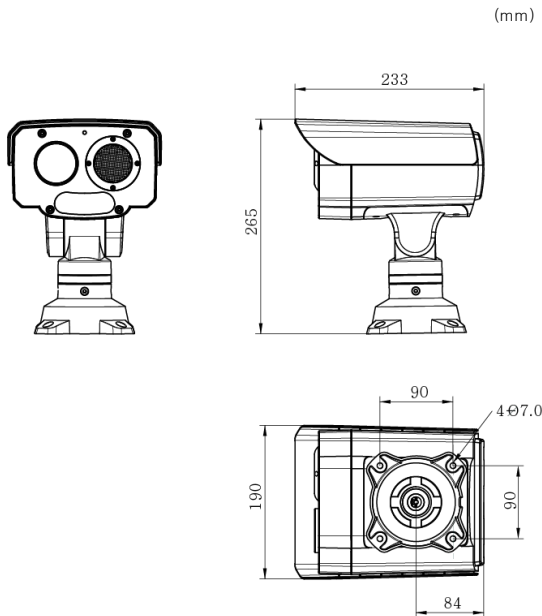

## 인증



영상보안시스템용 IP카메라  
공공기관용 IP카메라 보안 성능품질 Ver.1  
**TTA-IT-V-24-083**