

4MP Speed Dome Type Camera

EM-IQS



- QHD 4Mega-pixel 2560x1440p @30fps
- SONY Progressive CMOS Sensor
- H.265 / H.264 압축 방식을 통한 선명한 화질 구현


제품 사양

모델명		EM-IQS(IR36x)
Lens	Focal Length	F = 6mm ~ 216mm
	FOV	H : 49.27°(Wide) ~ 1.85°(Tele), V : 28.93°(Wide) ~ 1.04°(Tele)
	Focus	Motorized / Auto, Manual
Image	Image Sensor	Sony Starvis 6MP Image Sensor
	Size	1/1.8 inch
	Scan System	Progressive CMOS Scan
	Video Signal to Noise	>50dB
	Minimum Illumination	0.2 Lux @ Color, 0.05 Lux @ B/W[1/30SEC.] / 0.02 Lux @ Color,0.005 Lux @ B/W[1/1SEC.]
Video	Compress Format	H.265 / H.264 / MJPEG
	Resolution	2560x1920 / 2560x1600 / 2560x1440 / 2048x1536 / 1600x1200 / 1920x1080 / 1280x1024 / 1280x960 / 1280x720 / 1024x768 / 854x480 / 640x480 / 640x360 / 320x240
	Max. Frame Rate	30fps @ all resolution
	Streaming	Triple Stream (Stream1,2,3) / RTP/RTSP, UnicastRTP, Multicast RTP
PTZ	Pan/Tilt Radius	팬 : 360°(무한회전) / 틸트 : -10°~90°
	Pan/Tilt Speed	프리셋 : 240°/SEC, 수동 : 0.1°~240°/SEC.(줌 배율과 연동), 스윙 : 1°~90°/초
	Zoom	광학 x36 / 디지털 x32
	Preset	255
	Patton	4 패턴 [패턴당 768 명령(약 5분 분량)]
Function	Day & Night	Auto/Day/Night(ICR)
	Privacy Area	8개, 구면좌표계
	AE Mode	Auto/Iris/Shutter/Manual
	Aperture	Adjustable
	White Balance	Auto/Indoor/Outdoor/Manual(Red, Blue Gain Adjustable)
	BLC/WDR/Defog	On/Off
	Special	Auto Flip/Auto Parking/Power-up Action

제품 사양

IR LED	Visible distance	Max 350M
Audio	Compress Format	G.711 u-law
	Streaming	Two way
Event	Sensor In	2port
	Alarm Out	1port
Network	Interface	RJ45 10/100 Base-T
	Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP,HTTP,DHCP,FTP,SMTP,DNS,DDNS
	ONVIF	Support
	Simultaneous Access	Max. 10 user
Power Supply / Current		DC12V 3.5A
Operating Temp / Humidity		-20°C ~ 50°C / -4°F ~ 122°F
Dimension		Ø226 x 362.8mm / Ø8.9 x 14.3" / 브라켓 제외
Weight		Approx. 7000 g (15.5lb/ 브라켓 제외)

외관도

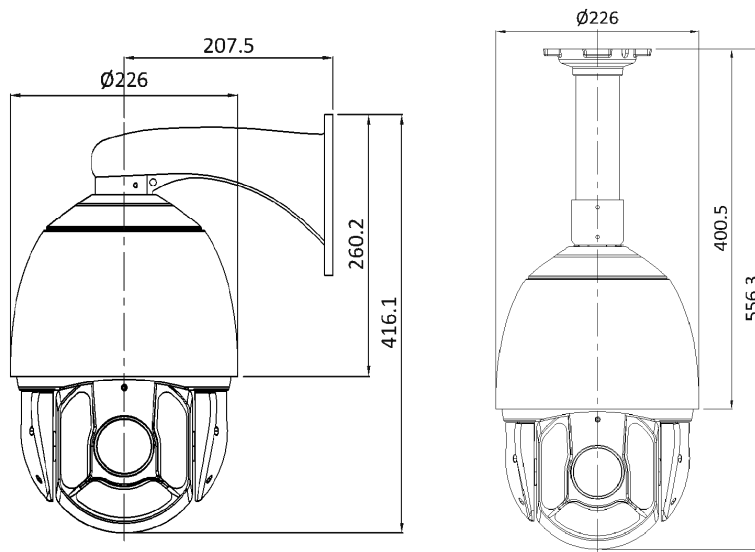

(mm)

인증



공공기관용 IP 카메라
보안성능품질 Ver.1
TTA-V-21-102