

EMSTONE_D_AI
4MP Full-color Vari-focal Warm LED Bullet

EM-IQV(IR2712LD)



- QHD 4Mega-pixel 2688x1520p @30fps
- Built-in Warm illuminator, and the max illumination distance is 70m
- IVS 알고리즘 탑재로 지능형 영상분석 기능 제공
- 방수, 방진 인증 IP67등급


제품 사양

모델명		EM-IQV(IR2712LD)
Camera	Image Sensor	1/1.8" 4Megapixel CMOS
	Max. Resolution	2688 (H) × 1520 (V)
	Electronic Shutter Speed	Auto/Manual 1/3 s-1/100000 s
	Min. Illumination	0.0005 Lux @ F1.0
	S/N Ratio	> 56 dB
	Illumination Distance	70 m (229.66 ft)
	Illuminator Number	4 (Warm light)
Lens	Lens Type	Motorized vari-focal
	Focal Length	2.7 mm ~12mm
	Field of View	H : 115°~48°, V : 59°~27°, D : 142° ~55°
Video	Video Compression	H.265/H.264/H.264B/MJPEG (only supported by the sub stream)/ Smart H.265+/ Smart H.264+
	Video Frame Rate	Main stream: 2688 × 1520 (1 fps-25/30 fps) /1920 × 1080 (1 fps-50/60 fps) Sub stream: D1 (1 fps-25/30 fps) Third stream: 1080p (1 fps-25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
	Resolution	4M(2688×1520); 3M(2304×1296); 1080p(1920×1080); 1.3M(1280×960); 720p(1280×720); D1(704×576/704×480); VGA(640×480); CIF(352×288/352×240)
	Stream Capability	3 streams
Function	Day/Night	Color/B/W
	BLC /HLC	Yes
	WDR	140 dB
	White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
	Motion Detection	OFF/ON (4 areas, rectangular)

제품 사양

Function	ROI	Yes (4 areas)
	Smart Illumination	Yes
	Image Rotation	0°/90°/180°/270°
	IVS	Tripwire, intrusion, fast moving, loitering detection, people gathering, parking detection
Network	Interface	RJ-45 (10/100 Base-T)
	SDK and API	Yes
	Protocol	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; 802.1x; SNMP
	Interoperability	ONVIF(Profile S/Profile G/Profile T); CGI; Milestone; P2P
	User/Host	20 (Total bandwidth: 80 M)
Audio	Twoway audio	Yes
	Compression	PCM; G.711a; G.711Mu; G.726; G.723
Power	Power Supply	12V DC (±30%)/PoE (802.3af)/ePoE
	Power Consumption	Basic : 2.4 W (12 VDC) 3.4 W (PoE) Max. (H.265 + 3 streams + intelligence + LED) : 7.6 W (12 VDC); 9.3 W (PoE)
Environment	Operating Conditions	-30°C to +60°C (-22°F to +140°F)/Less than 95% RH
	Protection	IP67
Structure	Dimensions	288.4 mm × 94.4 mm × 84.7 mm
	Net Weight	1.0 kg (2.2 lb)

외관도

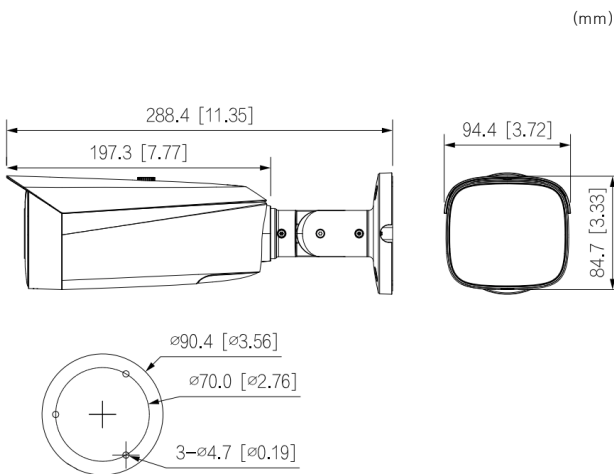

인증

