

EMSTONE_D_AI 5MP Bullet

EM-IQV(IR36D)



- QHD 5Mega-pixel 2592x1944p @20fps
- IVS 알고리즘 탑재로 기본적인 지능형 기능 (트립와이어, 침입) 제공
- Starlight 기술로 저조도 환경에서도 선명한 영상 제공
- 방수, 방진 인증 IP67등급


제품 사양

모델명		EM-IQV(IR36D)
Camera	Image Sensor	1/2.7" 5Megapixel progressive CMOS
	Max. Resolution	2592 (H) × 1944 (V)
	Electronic Shutter Speed	Auto/Manual 1/3 s-1/100000 s
	Min. Illumination	0.008 Lux @ F1.6
	S/N Ratio	> 56 dB
	Illumination Distance	80 m (262.5 ft)
	Illuminator Number	4 (IR LED)
Lens	Lens Type	Fixed-focal
	Focal Length	3.6 mm
	Field of View	H : 84°, V : 58°, D : 110°
Video	Video Compression	H.265/H.264/H.264B/MJPEG (only supported by the sub stream)/ Smart H.265+/ Smart H.264+
	Video Frame Rate	Main stream : 2592 × 1944 (1 fps-20 fps) / 2688 × 1520 (1 fps-25/30 fps) Sub stream: 704 × 576 (1 fps-25 fps) / 704 × 480 (1 fps-30 fps)
	Stream Capability	2592×1944(2592×1944)/2688×1520(2688×1520)/3M(2048×1536)/ 2304×1296(2304×1296)/1080p(1920×1080)/1.3M (1280 × 960)/720p(1280×720)/ D1(704× 576/704×480)/VGA(640×480)/CIF(352×288/352×240)
	Resolution	2 streams
Function	Day/Night	Auto(ICR)/Color/B/W
	BLC /HLC	Yes
	WDR	120 dB
	White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
	Motion Detection	OFF/ON (4 areas, rectangular)

제품 사양

Function	ROI	Yes (4 areas)
	Smart Illumination	Yes
	Image Rotation	0°/90°/180°/270° (Supports 90°/270° with 2592 × 1944 resolution and lower.)
	IVS	Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human)
Audio	Twoway audio	Yes
	Audio Compression	G.711a; G.711Mu; G.726
Network	Interface	RJ-45 (10/100 Base-T)
	SDK and API	Yes
	Protocol	IPv4/ IPv6/ HTTP/ TCP/ UDP/ ARP/ RTP / RTSP/ RTCP/ RTMP/ SMTP/ FTP/ SFTP/ DHCP/ DNS/ DDNS/ QoS/ UPnP/ NTP/ Multicast/ ICMP/ IGMP/ NFS/ PPPoE/ Bonjour
	Interoperability	ONVIF (Profile S/Profile G/Profile T)/ CGI / Milestone / Genetec / P2P
	User/Host	20
Power	Power Supply	12V DC/PoE (802.3af)
	Power Consumption	< 8.2W
Environment	Operating Conditions	-40°C to +60°C (-40°F to +140°F)/less than ≤ 95% RH
	Protection	IP67
Structure	Dimensions	238.5 mm × 90.7 mm × 90.7 mm (9.39" × 3.57" × 3.57")
	Net Weight	0.72 kg (1.59 lb)

외관도

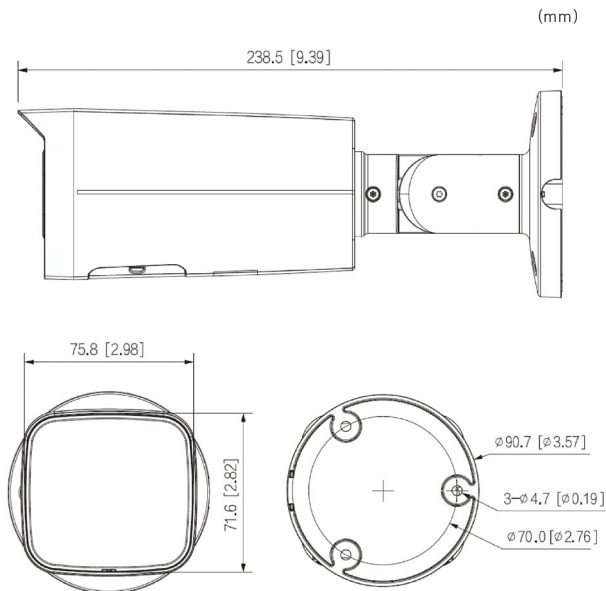

인증

