

EMSTONE_D_AI
5MP Full-color Fixed-focal Warm LED Bullet
EM-IQV(IR36LD)



- QHD 5Mega-pixel 2592x1944p @20fps
- Built-in Warm light, max illumination distance : 30m
- IVS 알고리즘 탑재로 기본적인 지능형 기능 (트립와이어, 침입) 제공
- 방수, 방진 인증 IP67등급

제품 사양


모델명		EM-IQV(IR36LD)
Camera	Image Sensor	1/2.7" 5Megapixel progressive CMOS
	Max. Resolution	2592 (H) × 1944 (V)
	Electronic Shutter Speed	Auto/Manual 1/3 s-1/100000 s
	Min. Illumination	0.003 Lux @ F1.0
	S/N Ratio	> 56 dB
	Illumination Distance	30 m (98.4 ft) (Warm light)
	Illuminator Number	1 (Warm light)
Lens	Lens Type	Fixed-focal
	Focal Length	3.6 mm
	Field of View	H : 77°, V : 56°, D : 101°
Video	Video Compression	H.265/H.264/H.264B/MJPEG (only supported by the sub stream)/ Smart H.265+/ Smart H.264+
	Video Frame Rate	Main stream: 2592 × 1944 @1-20 fps 2688 × 1520 @1-25/30 fps Sub stream: 704 × 576 @1-25 fps/704 × 480 @1-30 fps Third stream: 1280 × 720@1-25/30 fps
	Resolution	5M(2592×1944); 4M(2688×1520); 3M(2304×1296); 1080p(1920×1080); 1.3M(1280×960); 720p(1280×720); D1(704×576/704×480); VGA(640×480); CIF(352×288/352×240)
	Stream Capability	3 streams
Function	Day/Night	Color/B/W
	BLC /HLC	Yes
	WDR	120 dB
	White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
	Motion Detection	OFF/ON (4 areas, rectangular)

제품 사양

Function	ROI	Yes (4 areas)
	Smart Illumination	Yes
	Image Rotation	0°/90°/180°/270° (Supports 90°/270° with 1080p resolution and lower.)
	IVS	Tripwire, Invasion
Network	Interface	RJ-45 (10/100 Base-T)
	SDK and API	Yes
	Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; SNMP
	Interoperability	ONVIF(Profile S/Profile G/Profile T); CGI; P2P; Milestone; Genetec
	User/Host	20 (Total bandwidth: 64 M)
Audio	Twoway audio	Yes
	Compression	G.711a; G.711Mu; G726
Power	Power Supply	12V DC/PoE
	Power Consumption	< 8.4W
Environment	Operating Conditions	-40°C to +60°C (-40°F to +140°F)/less than ≤ 95% RH
	Protection	IP67
Structure	Dimensions	192.7 mm × 70.5 mm × 66.4 mm
	Net Weight	590 g (1.3 lb)

외관도

(mm)

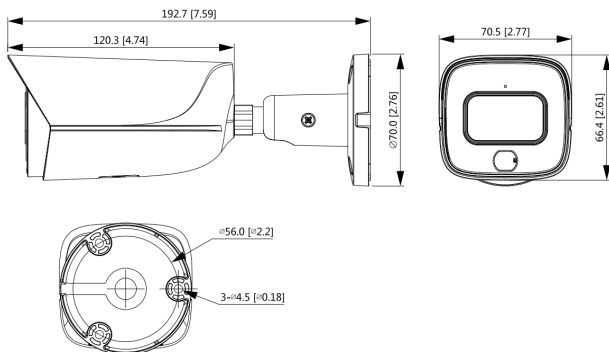

인증

