

5MP Bullet Type Camera

EM-IQV P Series



- 5Mega-pixel @30fps
- 2.8/3.6mm Fixed Lens Type
- 높은 효율의 H.256, H.264 압축 방식을 통한 선명한 화질
- IP66

제품 사양


모델명		EM-IQV(IR28P)		EM-IQV(IR36P)	
Camera	Image Sensor	1/2.7" 5M Progressive Scan CMOS			
	Max. Resolution	5Mega pixels, 2880x1620			
	Electronic Shutter Speed	1/3 sec ~ 1/10,000sec			
	Min. Illumination	COLOR : 0.006 Lux@F1.6, AGC ON ,B/W : 0 Lux with light			
	S/N Ratio	> 56 dB			
	Illumination Distance	More than 30M, Wave: 850nm			
	Illuminator Number	IR LED(2W) 1EA, WARM LED(2W) 1EA			
Lens	Lens Type	Fixed			
	Focal Length	2.8mm		3.6mm	
	Field of View	H : 110° / V : 60° / D : 133°		H : 95° / V : 48° / D : 112°	
Video	Video Compression	H.265 / H.264 / MJPEG			
	Video Frame Rate	Max. 30 fps			
	Stream Capability	3 streams			
	Resolution	5M(2880x1620)/4M(2560x1440)/1080p(1920x1080)/720p(1280x720)/D1 (704x480)/CIF(352x240)			
Function	Day/Night	Auto(CDS) / Day / Night(ICR)			
	DNR(2D/3D)	OFF/Level Adjustment(1~5)			
	BLC/HLC	Yes			
	WDR	120dB			
	White Balance	Auto/Manual			
	Motion Detection	Yes, Support alarm triggering by specified target types (human and vehicle)			
	ROI	Yes			
	Smart Illumination	Yes			
	Image Rotation	0°/90°/180°/270°, Up-and-down inversion, left-and-right inversion			
	IVS	Line crossing detection, Area intrusion , Region Entrance, Region Exiting (support alarm triggering by specified target types (human and vehicle)), Fast Moving, Video Shelter			

제품 사양

Network	Interface	RJ-45 (10/100 Base-T)
	Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour
	Interoperability	ONVIF(Profile S)
	User/Host	10
Power	Power Supply	12V DC/PoE (802.3af)
	Power Consumption	Max. 10W
Environment	Operating Conditions	-30 C to +60 C /less than ≤ 95% RH
	Protection	IP66
Structure	Dimensions	Φ68 x 172.3mm
	Net Weight	490g

외관도

(mm)

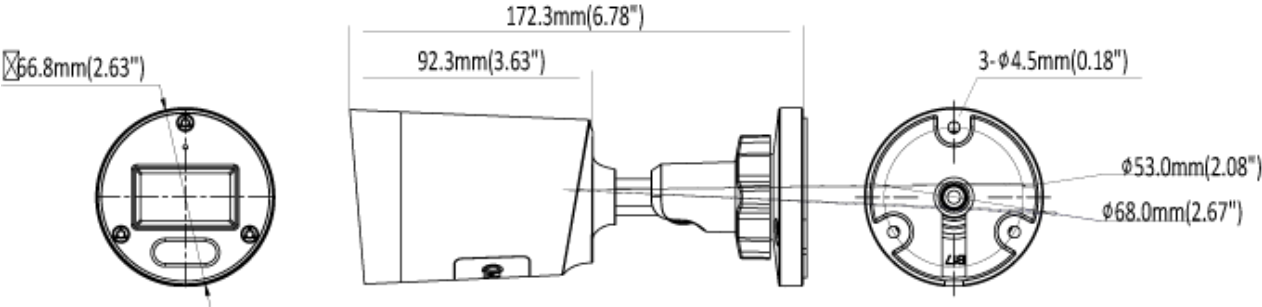

인증

