

EMSTONE_D_AI 12MP SKY View

EM-ISV(IR2712ZD)



- SHD 12Mega-pixel 4000x3000p @25/30fps
- IVS 알고리즘 탑재로 지능형 영상 분석 기능 제공
- Starlight 기술로 저조도 환경에서도 선명한 영상 제공
- 방수, 방진 인증 IP67등급


제품 사양

모델명		EM-ISV(IR2712ZD)
Camera	Image Sensor	1/1.7" 12Megapixel progressive CMOS
	Max. Resolution	4000 (H) × 3000 (V)
	Electronic Shutter Speed	Auto/Manual 1/3 s-1/100000 s
	Min. Illumination	0.01 Lux@F1.8 (Color,30IRE) / 0.001 Lux@F1.8 (B/W,30IRE)/ 0 Lux (Illuminator on)
	S/N Ratio	> 56 dB
	Illumination Distance	60 m
	Illuminator Number	4 (IR LED)
Lens	Lens Type	Motorized vari-focal
	Focal Length	2.7~12 mm
	Field of View	H : 103°~44°, V : 75°~33°, D : 135°~55°
Video	Video Compression	H.265/H.264/MJPEG (only supported by the sub stream)
	Video Frame Rate	Main stream: 4000 × 3000 @1-25/30 fps Sub stream: 704 × 576@1-25fps, 704 × 480@1-30fps Third stream: 1920 × 1080 @1-25/30 fps Fourth stream: 1920 × 1080 @1-25/30 fps Fifth stream: 704 × 576 @1-25 fps; 704 × 480 @1-30 fps
	Stream Capability	5 streams
	Resolution	12M (4000 × 3000); 8M (3840 × 2160); 6M (3072 × 2048); 5M (3072 × 1728); 5M (2592 × 1944); 4M (2688 × 1520); 3M (2048 × 1536); 3M (2304 × 1296); 2M (1920 × 1080); 1.3M (1280 × 960); 720P (1280 × 720); D1 (704 × 576/704× 480); CIF (352 × 288/352 × 240); VGA (640 × 480)
Function	Day/Night	Auto(ICR)/Color/B/W
	BLC /HLC	Yes
	WDR	120 dB
	White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
	Motion Detection	OFF/ON (4 areas, rectangular)
	Rol	Yes (4 areas)
	Smart Illumination	Yes
	Image Rotation	0°/90°/180°/270° (Supports 90°/270° with 2688 × 1520 resolution and lower)

제품 사양

Function	IVS	Tripwire, Invasion
	Intelligent	Face Detection, Face Recognition, Face and Body Detection, People Counting, Video Metadata, Intelligent Search
Network	Interface	RJ-45 (10/100 Base-T)
	SDK and API	Yes
	Protocol	IPv4/ IPv6/ HTTP/ TCP/ UDP/ ARP/ RTP / RTSP/ RTCP/ RTMP/ SMTP/ FTP/ SFTP/ DHCP/ DNS/ DDNS/ QoS/ UPnP/ NTP/ Multicast/ ICMP/ IGMP/ NFS/ PPPoE/ Bonjour
	Interoperability	ONVIF (Profile S/Profile G/Profile T)/ CGI / P2P
	User/Host	20 (Total bandwidth: 240 M)
Power	Power Supply	12V DC/24V AC/POE+(802.3at); ePoE
	Power Consumption	Basic power consumption: 4.9W (12V DC); 6.53W (24V AC active power); 6.3W (PoE) Max. power consumption: 15.2W (12V DC); 19.32W(24V AC active power); 18.9W (PoE)
Environment	Power Consumption	-40°C to +65°C (-40°F to +149°F)/less than ≤ 95% RH
	Protection	IP67
Structure	Dimensions	340.1 mm × 138.3 mm × 134 mm (13.39" × 5.44" × 5.28")
	Net Weight	2.4 kg (5.29 lb)

외관도

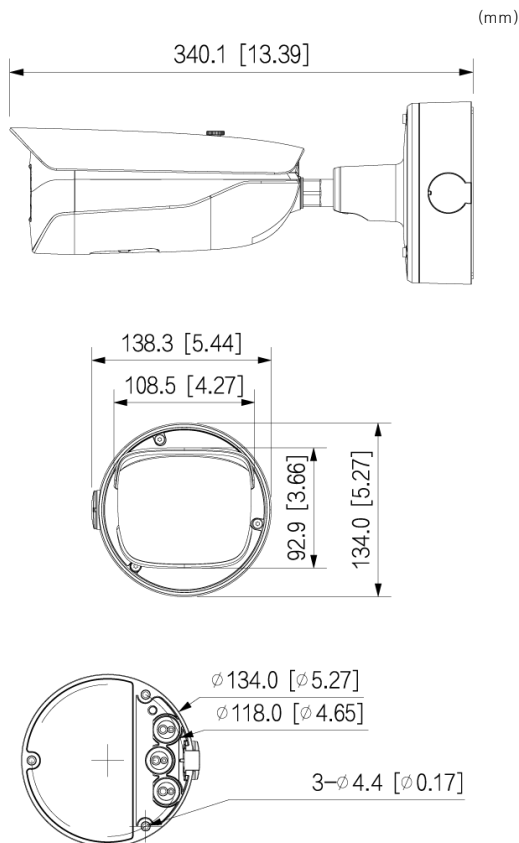

인증

