

EMSTONE_D_AI 12MP Fisheye

EM-IUF(L17D)



- 4K UHD 8Mega-pixel 3840x2160p @30fps
- IVS 알고리즘 탑재로 기본적인 지능형 기능(트립와이어, 침입) 제공
- Starlight 기술로 저조도 환경에서도 선명한 영상 제공
- 방수, 방진 인증 IP67등급


제품 사양

모델명		EM-IUF(L17D)
Camera	Image Sensor	1/1.7" 12Megapixel Progressive CMOS
	Effective pixel	4000 (H) 3000 (V)
	Shutter Speed	(Auto/Manual)1/3~1/100000s
	ROM/RAM	4GB / 4GB
	Min. Illumination	0.01 Lux/F2.0 (Color)
	S/N Ratio	> 56 dB
	Illuminator Number	3 (IR LEDs)
Lens	Lens Type	Fixed
	Focal Length	1.85mm
	Max. Aperture	F2.0
	Angle of view	Horizontal: 185 ; Vertical: 180
Parking	Parking lot detection LED color	7
	Parking lot detection	6
	Smart Event	Parking lot detection
Video	Compression	H.265+, H.265, H.264+, H.264, MJPEG
	Bit Rate	Main stream : 2592 × 1944 (1 fps~20 fps) / 2688 × 1520 (1 fps~25/30 fps) Sub stream: 704 × 576 (1 fps~25 fps) / 704 × 480 (1 fps~30 fps)
	Resolution	4000x3000@30fps/2432x2432@30fps/2016x2016@30fps/704x480@30fps
Function	Day/Night	Auto(ICR)/Color/B/W
	BLC /HLC	Yes
	WDR	DWDR
	White Balance	Auto/Manual
	Gain control	Auto/Manual

제품 사양

Function	ROI	Yes (4 areas)
	Noise	3DNR
	IVS	Intrusion, Tripwire, Heat Map, People Counting
	Privacy masking	Privacy masking
Network	Interface	RJ-45 (10/100 Base-T)
	Protocol	HTTP, TCP, ARP, RTSP, RTP, UDP, RTCP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/v6, SNMP, QoS, UPnP, NTP
	Interoperability	ONVIF (Profile S/Profile G), CGI
	Storage	FTP, Micro SD card (256 G)
	User/Host	20
Audio	Twoway audio	Yes
	Compression	G.711A; G.711Mu; G.726; G.723
Power	Power Supply	DC12V, PoE(802.3af)
	Power Consumption	<13W
Environment	Operating Conditions	-30°C ~ +45°C / ≤95%
	Protection	IP67 / IK10
Structure	Dimensions	75 mm x Φ170 mm
	Net Weight	0.77 kg(1.70 lb)

외관도

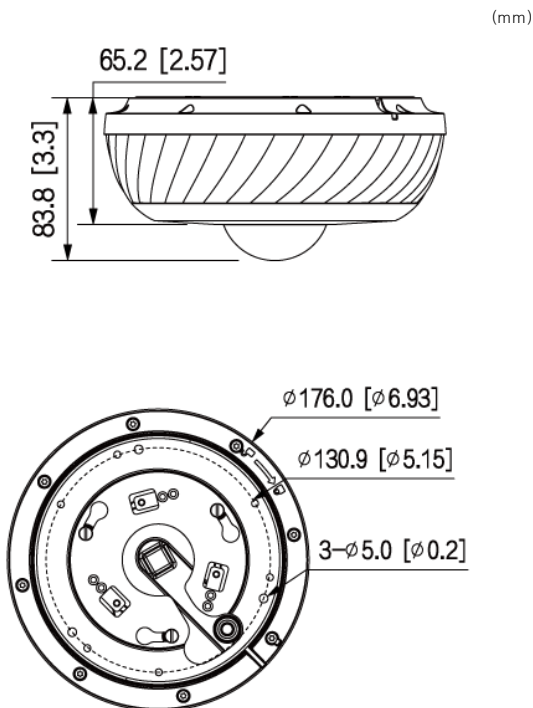

인증

