

EMSTONE_D_AI 8MP Bullet

EM-IUV(IR2713ZD)



- 4K UHD 8Mega-pixel 3840x2160p @30fps
- IVS 알고리즘 탑재로 기본적인 지능형 기능(트립와이어, 침입) 제공
- Starlight 기술로 저조도 환경에서도 선명한 영상 제공
- 방수, 방진 인증 IP67등급


제품 사양

모델명		EM-IUV(IR2713ZD)
Camera	Image Sensor	1/2.8" 8Megapixel progressive CMOS
	Max. Resolution	3840 (H) × 2160 (V)
	Electronic Shutter Speed	Auto/Manual 1/3 s-1/100000 s
	Min. Illumination	0.007 Lux@ F1.5(Color) / 0.007 Lux@F1.5(B/W)
	S/N Ratio	> 56 dB
	Illumination Distance	60 m (197ft)
	Illuminator Number	4 (IR LED)
Lens	Lens Type	Motorized vari-focal
	Focal Length	2.7 -13.5mm
	Field of View	H : 113°~31° / V : 58°~17° / D : 138°~36°
Video	Video Compression	H.265/H.264/H.264B/MJPEG (only supported by the sub stream)/ Smart H.265+/ Smart H.264+
	Video Frame Rate	Main stream:3840x2160 @(1-20 fps by default)/3840x2160 @(1-25/30 fps when AI function disabled) sub stream:704x576@(1-25 fps)/704x480@(1-30 fps) third stream:1920x1080 @(1-25/30 fps)
	Stream Capability	8M(3840x2160)/6M(3072x2048)/5M(3072x1728/2592x1944)/4M(2688x1520)/3M(2048×1536)/2304×1296(2304×1296)/1080p(1920×1080)/1.3M (1280 × 960)/720p(1280×720)/D1(704× 576/704×480)/VGA(640×480)/CIF(352×288/352×240)
	Resolution	3 streams
Function	Day/Night	Auto(ICR)/Color/B/W
	BLC /HLC	Yes
	WDR	120 dB
	White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
	Motion Detection	OFF/ON (4 areas, rectangular)

제품 사양

Function	ROI	Yes (4 areas)
	Smart Illumination	Yes
	Image Rotation	0°/90°/180°/270° (Supports 90°/270° with 1080p resolution and lower.)
	IVS	Tripwire, intrusion (support the classification and accurate detection of vehicle and human)
Audio	Twoway audio	Yes
	Audio Compression	G.711a; G.711Mu; PCM; G.726; G.723
Network	Interface	RJ-45 (10/100 Base-T)
	SDK and API	Yes
	Protocol	IPv4/ IPv6/ HTTP/ TCP/ UDP/ ARP/ RTP / RTSP/ RTCP/ RTMP/ SMTP/ FTP/ SFTP/ DHCP/ DNS/ DDNS/ QoS/ UPnP/ NTP/ Multicast/ ICMP/ IGMP/ NFS/ PPPoE/ Bonjour
	Interoperability	ONVIF(Profile S/Profile G/Profile T)/CGI/RTSP/EMSTONE
	User/Host	20 (Total bandwidth: 72 M)
Power	Power Supply	12V DC/PoE (802.3af)
	Power Consumption	Basic power consumption: 3.0W (12V DC); 3.5W (PoE) Max. power consumption: 9.2W (12V DC); 10.7W (PoE)
Environment	Operating Conditions	-40°C to +60°C (-40°F to +140°F)/less than ≤ 95% RH
	Protection	IP67
Structure	Dimensions	244.1mmx79.0mmx75.9mm (9.6"x3.1"x3.0")(LxWxH)
	Net Weight	820g (1.8 lb)

외관도

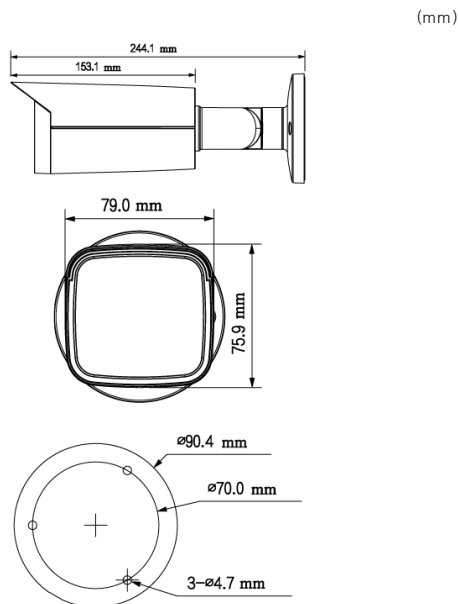

인증

