

2MP PTZ Bullet Type Camera

EM-IHP



- Full-HD 2Mega-pixel 1920x1080p @30fps
- SONY Progressive CMOS Sensor
- H.265 / H.264 압축 방식을 통한 선명한 화질 구현


제품 사양

모델명		EM-IHP(IR12x)	EM-IHP(IR12xP)
Lens	Focal Length	5.3~64mm	
	FOV	H:66.5°(wide)~5.8°(tele) V:33.7°(wide)~2.8°(tele)	
	Focus	Motorized / Auto, Manual	
Image	Image Sensor	Sony 2MP Image Sensor	
	Size	1/2.8 inch	
	Scan System	Progressive Scan	
	Video Signal to Noise	>50dB	
	Minimum Illumination	0.002 lux(Color), 0 lux(BW, IR on)	
Video	Compress Format	H.265+ / H.265(HEVC) / H.264+ / H.264 / MJPEG	
	Resolution	1920×1080 / 1280×960 / 1280×720 / 704×576	
	Max. Frame Rate	30fps @ all resolution	
	Streaming	Triple Stream (Stream1,2,3) / RTP/RTSP, UnicastRTP, Multicast RTP	
PTZ	Pan Radius	360° endless	
	Pan Speed	Pan manual speed : 0.2°~60°/s, Pan preset speed : 100°/s	
	Tilt Radius	-45°~30°	
	Tilt Speed	Tilt manual speed : 0.2°~30°/s, Tilt preset speed : 60°/s	
	Proportional Zoom	Support	
	Preset	255	
	Patrol	8 Patrol, 48 preset can be saved	
	PTZ position indication	Support	
Function	Day & Night	Auto/Day(Color)/Night(BW)	
	Privacy Area	Support	
	Motion Detection	Support	
	WDR/DNR/Defog/HCL/LDC	Support	

제품 사양

Function	Ext. Video	Not Support	
	Elec.Shutter	Auto(1/5~1/100000), Manual	
	White Balance	Auto/Indoor/Outdoor	
IR LED	IR LEDs	1pcs W-LEDs / 4pcs IR LEDs	
	Visible distance	Max 100M	
Audio	Compress Format	G.711 u-law	
	Streaming	Two way	
Event	Sensor In	1 port	-
	Alarm Out	1 port	-
Network	Interface	RJ45 10/100 Base-T	
	Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP,HTTP,DHCP,FTP,SMTP,DNS,DDNS	
	ONVIF	Support	
	Simultaneous Access	Max. 9 user	
Power Supply / Current		DC12V 2A	DC12V 2A / PoE
Operating Temp / Humidity		-30℃~+60℃ / 0% ~ 90%	
Dimension		291mm X 207mm X 95mm	
Weight		Approx. 2000 g	

외관도

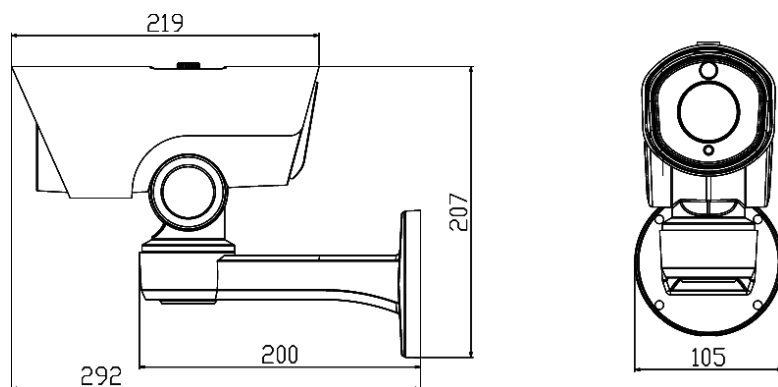

인증

