

8MP Bullet Type Camera

EM-IUV(IR2812ZP)



- 8Mega-pixel @30fps
- Clear video quality with H.265 / H.264 compression
- IR LED / Warm LED
- IP67

Specification


Model		EM-IUV(IR2812ZP)
Camera	Image Sensor	1/1.8" 8Megapixel CMOS
	Max. Resolution	3840 x 2160 pixel
	Electronic Shutter Speed	1/3 sec ~ 1/10,000sec
	Min. Illumination	0.003Lux@F1.0 (Color), 0Lux with light (B/W)
Lens	Lens Type	Motorized vari-focal
	Focal Length	2.8mm ~ 12mm
	Field of View	H : 112° ~ 48° / V : 59° ~ 28°
Video	Video Compression	H.265 / H.264
	Video Frame Rate	Max. 30fps for / 8M,6M,5M,4M,1080P,720P,D1,CIF
Function	Day/Night	Auto / Day / Night
	DNR	2D/3D Support
	BLC/HLC/WDR	Yes
	White Balance	Auto/Manual
	IVS	Motion detection, Line Crossing, Area Intrusion, Region Entrance, Region Exiting, Fast Moving

Specification

Network	Interoperability	RJ-45 (10/100 Base-T)
	User/Host	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP
	Interoperability	ONVIF(Profile S)
	User/Host	10
Power	Power Supply	12V DC/PoE
Environment	Operating Conditions	-30°C to +60°C /less than ≤ 95% RH
	Protection	IP67
Structure	Dimensions	Φ93.5 mm × 278.9 mm
	Net Weight	1000g

Dimensions

(mm)

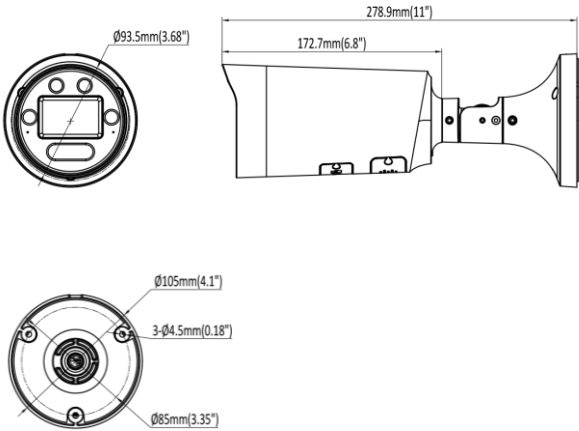

Certification

