

12MP Parking Guidance Fisheye Camera

EM-IUF(T16P)



- 12Mega-pixel @30fps
- 1:1 비율의 센서로 선명하고 왜곡 없는 영상
- Daisy-chain 방식으로 최대 5대 전원 공급
- 최대 16대 주차면 인식
- 열원 센서 탑재 및 AI 불꽃/연기 감지

제품 사양


모델명		EM-IUF(T16P)
Camera	Image Sensor	1/1.6" 12Megapixel CMOS
	Max. Resolution	3504 x 3504 pixel
	Electronic Shutter Speed	1/3 sec ~ 1/100,000sec
	Min. Illumination	0.03Lux@F2.0 (Color)
Lens	Focal Length	2.3mm
	Field of View	H/V/D : 185°
Video	Video Compression	H.265 / H.264 / MJPEG
	Video Frame Rate	Max. 30fps
Function	DNR/ROI	Yes
	BLC/HLC/WDR	Yes
	White Balance	Auto/Indoor/Outdoor/Manual
Audio	Input	MIC 2
	Output	Speaker 1
Thermal	Detector Type	IR array thermal sensor
	Resolution	32 x 24 pixel

제품 사양

Network	Interface	RJ-45 (10/100 Base-T)
	Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP
	Interoperability	ONVIF(Profile S,G,T)
	User/Host	10
Power	Single	DC12V / PoE(IEEE 802.3af)
	Daisy Chain	DC48V : Max 5EA / PoE : 30W(2EA), 60W(4EA), 90W(5EA)
Environment	Operating Conditions	-20°C to +50°C /less than ≤ 90% RH
	Protection	IP66
Structure	Dimensions	Φ158 mm × 75.15 mm
	Net Weight	1000g

외관도

(mm)

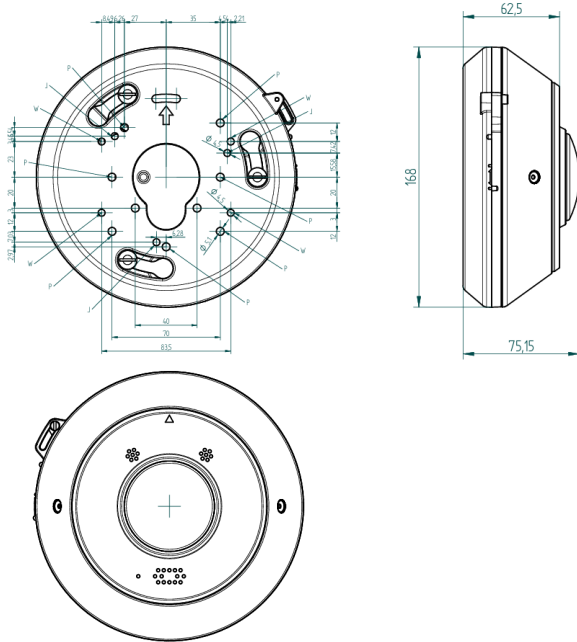

인증

